

illumin8



High Quality LED Lighting

illuminate your world.



WWW.ILLUMIN8.CO.ZA

Illumin8 Lighting (Pty) Ltd

Product Catalogue

September 2026



illuminate your world.

Floodlights

Stellar Series Slim LED Floodlights	6
Stellar Series Slim LED Floodlight with Day/Night Sensor	7
Stellar Series Slim LED Floodlight with Motion Sensor	8
Ecolite Series LED RGB Floodlights	9
Lumina Pro Series Compact Solar Sensor Floodlights	10
Lumina Pro Series Slim LED Solar Floodlights	11
Ecolite Series Slim LED Floodlights	12

Spotlights

GU10 3 Wire Track Spotlights	13
LED Track Rail Spotlights	14
Accessories for Lumina Pro Series Track Rail Spotlights	15

LED Retrofit Modules

2D LED Retrofit Modules	16
2D LED Retrofit Modules with Variable CCT	17

Sensors

20 A Photocell	18
16 A Photocell	19
PIR Occupancy Motion Sensors	20

Bulbs

A60/A65 LED Bulbs	21
G45 LED Bulbs	22
A60 LED Colour Bulbs	23
A60/A65 LED Emergency Bulbs	24
A60 LED Sensor Bulbs	25
T37 LED Stick Bulbs	26
C37 LED Candle Bulbs	27
C37 LED Candle Bulbs	28
C37 LED Dimmable Candle Bulbs	29
T80/120 LED Bulbs	30
R125 Infrared Reflector Lamps	31
GU10 LED Bulbs 38°	32
GU10 LED Dimmable Bulbs 38°	33
GU10 LED Bulbs 120°	34
GU10 LED Colour Bulbs 38°	35

Downlight Fittings

Round 95mm Tilttable GU10 Downlight Fittings	36
Square 95mm Tilttable GU10 Downlight Fittings	37
Round 82mm Twist-Lock GU10 Downlight Fittings	38
Round 85mm Anti-Glare GU10 Downlight Fittings	39
GU10 Lamp Holders	40
B22 Lamp Holders	41

Panel Lights

Surface Mount Round LED Panel Lights	42
Recessed Mount Round LED Panel Lights	43
Surface Mount Square LED Panel Lights	44
Recessed Mount Square LED Panel Lights	45
Recessed Mount Backlit LED Panel Lights	46

Ceiling Lights

LED Ceiling Lights	48
--------------------	----

Fans

Ceiling Fans	51
Ceiling/Wall Mount Extractor Fans	62
Ceiling Mount Extractor Fans	63

High Bay Lights

Ecolite Series LED UFO High Bay Lights	64
Lumina Pro Series LED UFO High Bay Lights	65
Solar LED Streetlights	66

Bulkhead Fittings

LED Bulkhead Fittings	67
-----------------------	----

Linear Fittings

Slim LED Linear Fittings	68
--------------------------	----

Tubes and Fittings

T8 LED Tubes	69
T5 LED Tubes	71
T8 Open Channel Fixtures	72
Weatherproof Outdoor Light Fittings	73





Committed to quality, innovation, and outstanding service.

Illumin8 Lighting is a dynamic organisation driven by a strong commitment to excellence across every area of our operations. We are dedicated to providing quality, affordable products that are environmentally responsible, energy efficient and cost effective for our customers.

We embrace the philosophy that our customers are at the heart of our business. Every effort is therefore made to deliver the best products, service and value at competitive prices. We are committed to offering solutions that combine high efficiency, reliable performance and reduced environmental impact.

We continue to expand our capabilities to meet the evolving needs of our customers. Through strong relationships across our supply chain, we have the ability to establish and maintain the high quality standards our customers expect. We remain responsive to changing market demands and are committed to continuously improving our products, service and offering in line with customer needs and expectations.



Experience

Our experience in the electrical and lighting business extends over 25 years.



Passion

Our dedication in our business along with our people skills, make us ready for any challenge.




Support

We give our customers peace of mind through a transparent and enriched customer experience.



WE BELIEVE THAT INTEGRITY, STRONG PARTNERSHIPS, AND A RELENTLESS COMMITMENT TO CUSTOMER SATISFACTION ARE THE CORNERSTONES OF OUR SUCCESS.

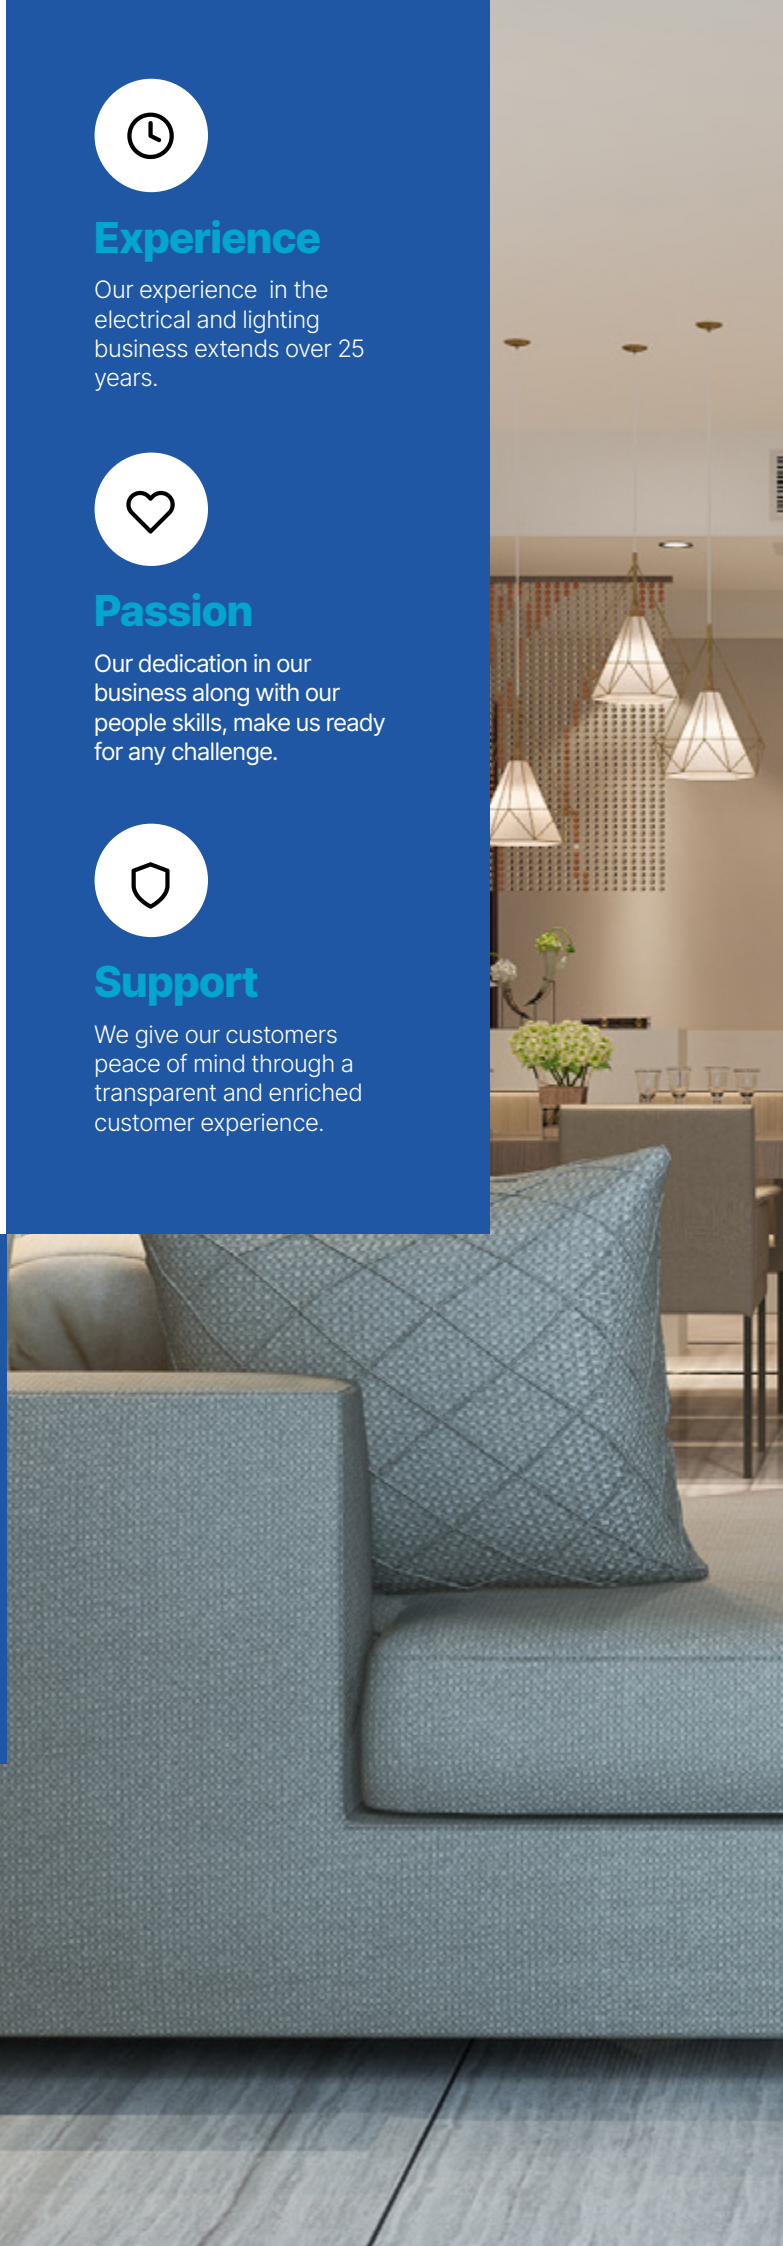





6500K
Lighting Colour

90-100lm/W
Lumens per Watt

Up To 8 kV
Surge Protection

230v 50Hz
Input Voltage

IP 65
Outdoor Use

30000Hrs
Lifespan



Stellar Series Slim LED Floodlights

Delivers high quality lighting that blends reliability and performance with elegant design.

Engineered with high-quality components for superior durability and consistent brightness, it's built to perform in demanding environments.

- ➔ High efficiency, energy saving LED bulb technology.
- ➔ Ultra-thin and compact aluminium lamp body design.
- ➔ Durable IP65 rated weatherproof housing and components.

Barcode	Model Number	Power Output (W)	Lumen Output	Dimensions (mm)
6009804146819	GFL-6500-010	10	800	95 × 74 × 21
6009804146727	GFL-6500-020	20	1600	111 × 88 × 23
6009804146734	GFL-6500-030	30	2700	148 × 114 × 29
6009804146741	GFL-6500-050	50	4500	187 × 144 × 35
6009804146758	GFL-6500-100	100	9000	187 × 144 × 35
6009804146765	GFL-6500-150	150	13500	292 × 227 × 38
6009804146772	GFL-6500-200	200	18000	349 × 256 × 41
6009804146789	GFL-6500-300	300	27000	408 × 310 × 47





6500K
Lighting Colour

90-100lm/W
Lumens per Watt

2Kv
Surge Protection

230v 50Hz
Input Voltage

IP 65
Outdoor Use

50000Hrs
Lifespan



Stellar Series Slim LED Floodlight with Day/Night Sensor

Includes built-in day/night sensor for convenient autonomous operation.

Featuring a sleek silver frame design that stands out from the ordinary, these premium floodlights are equipped with high-quality components for lasting durability. Built-in day/night sensors ensure automatic operation, enhancing convenience and energy efficiency. With integrated surge protection, the Stellar Series is engineered to withstand power fluctuations, delivering reliable lighting in all conditions.

- ➔ High efficiency, energy saving LED technology.
- ➔ Ultra-thin and compact aluminium lamp body design.
- ➔ Durable IP65 rated weatherproof housing and components.
- ➔ Longer lifespan that uses up to 90% less energy than traditional lamps.
- ➔ Built-in day/night sensor for convenient auto power on/off according to ambient light.

Barcode	Model Number	Power Output (W)	Lumen Output	Dimensions (mm)
6009804578313	GDN-6500-020	20	1800	111 × 88 × 23
6009804146888	GDN-6500-030	30	2700	148 × 114 × 29
6009804146895	GDN-6500-050	50	4500	187 × 144 × 35





6500K
Lighting Colour

90-100lm/W
Lumens per Watt

2Kv
Surge Protection

230v 50Hz
Input Voltage

IP 65
Outdoor Use

50000Hrs
Lifespan



Stellar Series Slim LED Floodlight with Motion Sensor

Delivers high quality lighting that blends reliability and performance with elegant design.

Engineered with high-quality components for superior durability, these floodlights feature a sleek, modern silver frame that adds a touch of sophistication to any exterior. Built-in PIR motion sensors offer automatic, energy-efficient illumination when movement is detected, enhancing both security and convenience. With integrated surge protection, the Stellar Series ensures reliable operation even in unstable power conditions.

- ➔ High efficiency, energy saving LED bulb technology.
- ➔ Ultra-thin and compact aluminium lamp body design.
- ➔ Durable IP65 rated weatherproof housing and components.
- ➔ Built-in PIR motion sensor with 120° detection angle.

Barcode	Model Number	Power Output (W)	Lumen Output	Dimensions (mm)
6009804146901	GMS-6500-020	20	1800	111 × 88 × 23
6009804146918	GMS-6500-030	30	2700	160 × 300 × 16
6009804146925	GMS-6500-050	50	4500	200 × 265 × 10





RGB
Lighting Colour

120°
Lighting Angle

up to 3Kv
Surge Protection

230v 50Hz
Input Voltage

IP 65
Outdoor Use

50000Hrs
Lifespan

3yrs
Warranty

Ecolite Series LED RGB Floodlights

Ideal for outdoor ambience and architectural lighting

Create vibrant outdoor lighting with a versatile RGB LED floodlight designed to transform gardens, patios, façades, entertainment areas and architectural features. Choose from a wide range of colours to create the perfect atmosphere, while the durable IP65-rated construction makes it ideal for outdoor applications.

- ➔ Built-in surge protection up to 3kV.
- ➔ Includes full function remote control.
- ➔ Slim and compact aluminium lamp body design.
- ➔ Durable IP65 rated weatherproof housing and components.
- ➔ High quality SMD2835 LED chipsets.

Barcode	Model Number	Power Output (W)	Lumen Output	Dimensions (mm)
6009804578290	RFL-RGB-020	20	27000	540 × 375 × 50
6009804578306	RFL-RGB-050	50	45000	605 × 460 × 65





Variable
Lighting Colour



165lm/W
Lumens per Watt



220°
Detection Angle



5-6Hrs
Charging Time



IP 65
Outdoor Use



50000Hrs
Lifespan

Lumina Pro Series Compact 3CCT Solar Sensor Floodlights

With built-in motion and day/night sensors.

Designed to deliver powerful, energy-efficient lighting with maximum convenience. Housed in a durable IP65-rated weatherproof casing, these floodlights are built to withstand harsh outdoor conditions while ensuring long-lasting performance. Featuring a built-in PIR motion sensor with a wide 120° detection angle, they provide reliable security and illumination whenever movement is detected. The integrated day/night sensor allows for automatic operation, switching the lights on and off according to ambient light levels for effortless energy saving. Offers adjustable brightness and selectable colour temperatures of 3000K, 4000K, or 6500K.

- ➔ Durable IP65 rated weatherproof housing and components.
- ➔ Built-in PIR motion sensor with 120° detection angle.
- ➔ Built-in day/night sensor for convenient auto power on/off according to ambient light.
- ➔ Variable brightness levels with selectable colour temperature between 3000/4000/6500K.

Barcode	Model Number	Power Output (W)	Lumen Output	Solar Panel	Battery Type	Dimensions (mm)
6009804146994	SFL-3CCT-008S	8	1200	5V / 2.5W	3.7V/2600mAh	193 x 98 x 42



6500K
Lighting Colour



120°
Lighting Angle



12Hrs
Runtime



5-6Hrs
Charging Time



IP 65
Outdoor Use



50000Hrs
Lifespan



Lumina Pro Series Slim LED Solar Floodlights

Eco-friendly lighting that doesn't compromise performance or design.

Combines sleek design with powerful, eco-friendly performance. Built for efficiency and reliability, these floodlights feature high-lumen output, intelligent light sensors, and a long-lasting solar battery – perfect for lighting up outdoor spaces without the need for wiring or high energy costs. Ideal for driveways, gardens, or security use, the slim profile offers a modern look while delivering dependable illumination, night after night.

- ➡ High quality LiFePO4 battery.
- ➡ High efficiency, energy saving LED technology.
- ➡ Ultra-thin and compact ABS lamp body design.
- ➡ Durable IP65 rated weatherproof housing and components.

Barcode	Model Number	Power Output (W)	Lumen Output	Solar Panel	Battery Type	Dimensions (mm)
6009804146574	SFL-6500-050	50	500	5V / 6W	3.2v / 4Ah	134 × 120 × 38
6009804146581	SFL-6500-100	100	1000	5V / 10W	3.2v / 8Ah	199 × 190 × 45
6009804146598	SFL-6500-200	200	2000	5V / 20W	3.2v / 15Ah	229 × 216 × 45
6009804146338	SFL-6500-300	300	3000	5V / 25W	3.2v / 20Ah	246 × 250 × 47
6009804578023	SFL-6500-400	400	4000	5V / 40W	3.2v / 40Ah	367 × 253 × 41
6009804578030	SFL-6500-500	500	5000	5V / 50W	3.2v / 50Ah	442 × 300 × 41



6500K
Lighting Colour

80-90lm/W
Lumens per Watt

Up To 6 kV
Surge Protection

230v 50Hz
Input Voltage

IP 65
Outdoor Use

30000Hrs
Lifespan



Ecolite Series Slim LED Floodlights

Delivers high quality lighting that blends affordability with reliability and performance.

Affordable, energy-efficient LED floodlights designed for powerful performance and long-lasting durability. With a sleek, weather-resistant design, these floodlights are perfect for outdoor security, landscape lighting, or architectural highlights.

➔ Ultra-thin and compact aluminium lamp body design.

Barcode	Model Number	Power Output (W)	Lumen Output	Dimensions (mm)
6009804146710	EFL-6500-010	10	800	105 × 72 × 26
6009804146727	EFL-6500-020	20	1600	120 × 86 × 28
6009804146734	EFL-6500-030	30	2700	156 × 114 × 30
6009804146741	EFL-6500-050	50	4500	188 × 139 × 32
6009804146758	EFL-6500-100	100	9000	242 × 174 × 34
6009804146765	EFL-6500-150	150	13500	266 × 200 × 36
6009804146772	EFL-6500-200	200	18000	329 × 276 × 38
6009804146789	EFL-6500-300	300	27000	379 × 272 × 45
6009804146796	EFL-6500-400	400	48000	473 × 385 × 49
6009804578104	EFL-6500-500	500	60000	537 × 437 × 52





Aluminium
Material



340°
Fitting Rotation



IP20
Indoor Use



GU10 3 Wire Track Spotlights

Uses standard GU10 bulbs.


Whether showcasing artwork, enhancing architectural details, or drawing attention to retail displays, our GU10 3-wire track spotlights deliver precision lighting with outstanding brightness. Engineered for effortless installation and seamless compatibility, these fixtures feature a sleek, modern design that blends seamlessly into any space. With adjustable positioning for targeted illumination, our track spotlights allow for flexible and impactful lighting arrangements, transforming any environment with style and sophistication.

- ➔ Includes lamp holder.
- ➔ Die cast aluminium body.
- ➔ 340° rotation.

Barcode	Model Number	Fitting Colour	Bulb Type	Dimensions (mm)
6009804146529	TRSL-GU10B	Black	GU10	ø60×100
6009804146536	TRSL-GU10W	White	GU10	ø60×100



illuminate your world.

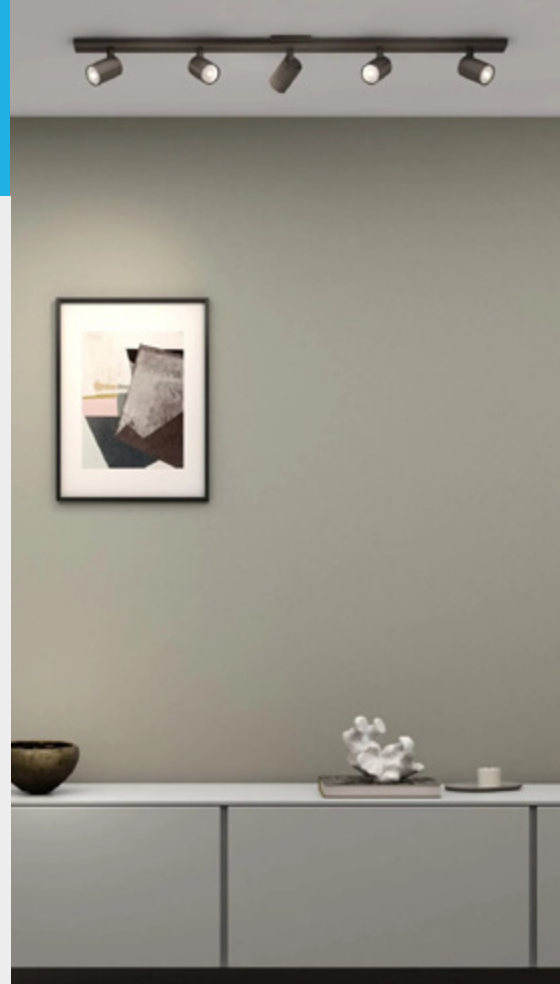

Various
Lighting Colour

4200lm
Lumen Output

220°
Lighting Angle

220v 50Hz
Input Voltage

80
CRI

80000Hrs
Lifespan



LED Track Rail Spotlights


Create lighting arrangements tailored to any space or design vision.

Whether illuminating artwork, accentuating architectural features, or highlighting merchandise in retail environments, our track rail spotlights provide pinpoint accuracy and exceptional brightness. Designed for easy installation and seamless integration, these fixtures offer a sleek and modern aesthetic that complements any interior decor. With their ability to focus light exactly where it's needed, our track rail spotlights empower users to create dynamic and captivating lighting displays that elevate the ambiance of any environment.

- ➔ Frosted lens for greater light radiance.
- ➔ Made from high quality polycarbonate and aluminium.
- ➔ CE, RoHS and TUV certifications.
- ➔ Powered by EagleRise driver technology for enhanced reliability and consistent LED performance.

Barcode	Model Number	Power Output (W)	Lumen Output	Lighting Colour	Dimensions (mm)
6009804146000	TSL-4000-035B	35	4200	4000K	ø80 × 170
6009804146017	TSL-4000-035W	35	4200	4000K	ø80 × 170
6009804146024	TSL-6500-035B	35	4200	6500K	ø80 × 170
6009804146031	TSL-6500-035W	35	4200	6500K	ø80 × 170



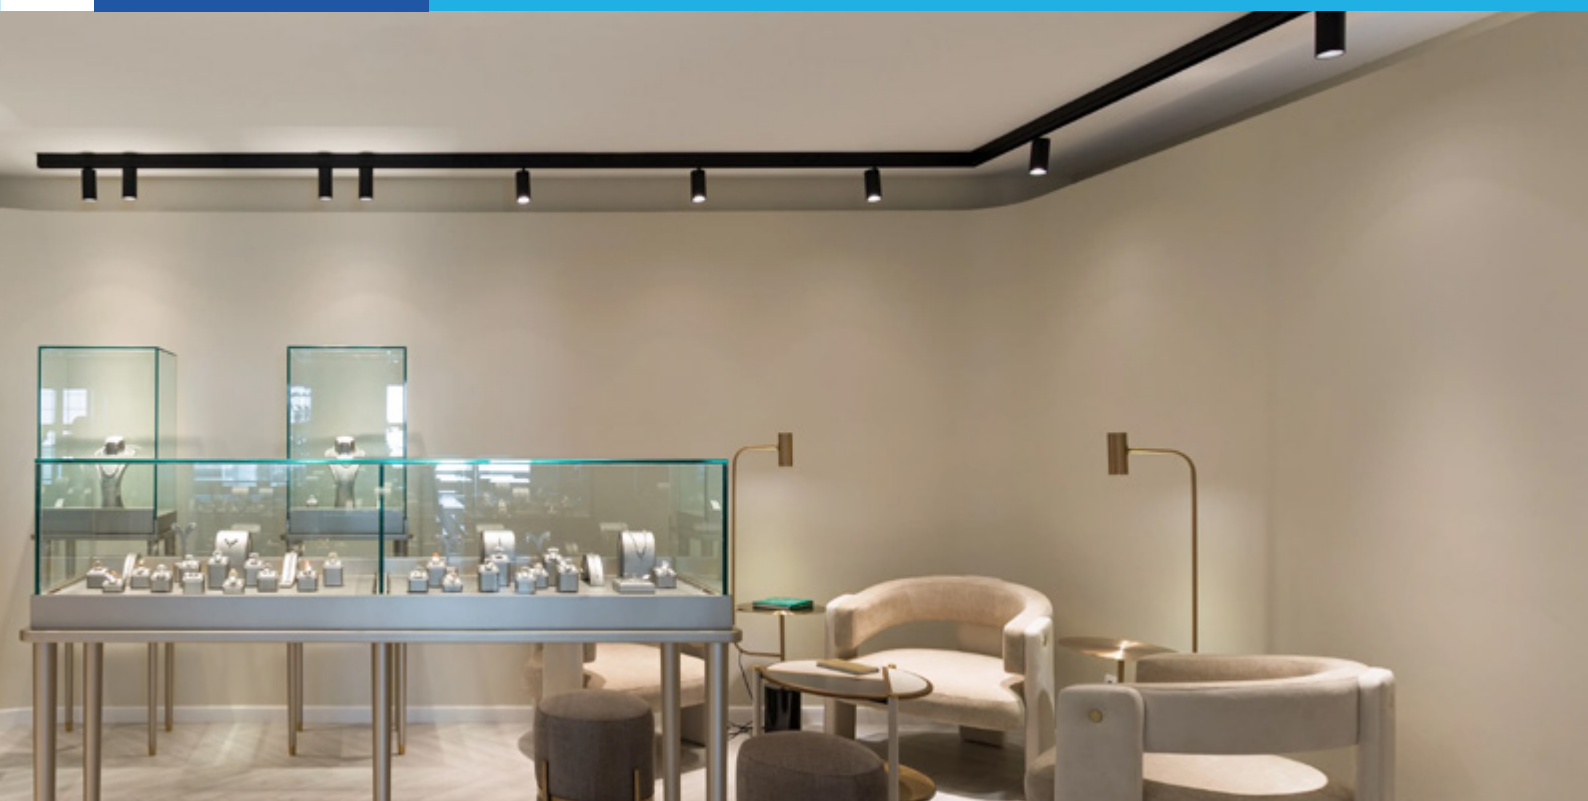


Accessories for Lumina Pro Series Track Rail Spotlights

Create lighting arrangements tailored to any space or design vision.

Part Number	Item Description	Dimensions (mm)
TSL-S101	1 Meter Track	1000 mm
TSL-S101	1 Meter Track	1000 mm
TSL-S107	2 Meter Track	2000 mm
TSL-S107	2 Meter Track	2000 mm
TSL-S113	Mini Direct Connector	79*35*18mm
TSL-S113	Mini Direct Connector	79*35*18mm
TSL-S116	Square Connector	183*35*17mm
TSL-S116	Square Connector	183*35*17mm
TSL-S128	Power Connector	108*35*17mm
TSL-S128	Power Connector	108*35*17mm
TSL-S134	Flexible Connector	198*35*17mm
TSL-S134	Flexible Connector	198*35*17mm
TSL-S122	T Connector	183*109*18mm
TSL-S122	T Connector	183*109*18mm
TSL-S125	+ Connector	182*182*18mm
TSL-S125	+ Connector	182*182*18mm



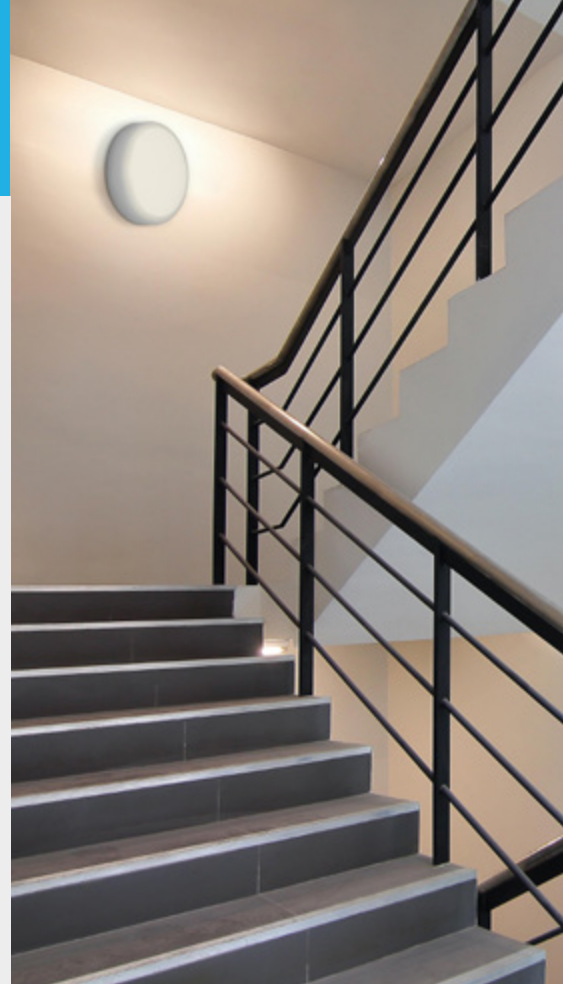

6500K
Lighting Colour

110lm/W
Lumens per Watt

1Kv
Surge Protection

230v 50Hz
Input Voltage

80
CRI

40000Hrs
Lifespan



2D LED Retrofit Modules


Replacement for conventional 2D fluorescent tubes.

Designed to replace traditional 2D fluorescent lamps with energy-efficient, long-lasting LED technology. These retrofit modules offer instant start-up, improved brightness, and significantly reduced power consumption, making them an ideal choice for bulkheads, ceiling fittings, and other 2D fixtures.

- ➔ High efficiency, energy saving LED bulb technology.
- ➔ Longer lifespan that uses up to 90% less energy than traditional bulbs.
- ➔ 1mm aluminium housing with heat resistant PC lens.
- ➔ CE/EMC certified driver.
- ➔ Quick and easy installation with magnetic attachment.
- ➔ Built-in surge protection up to 1Kv.
- ➔ High quality Sanan 2835 SMD LED chips.

Barcode	Model Number	Power Output (W)	Lumen Output	Dimensions (mm)
6009803785750	RM-12W	12	1320	135 × 135
6009803785071	RM-18W	18	1980	151 × 151
6009803785767	RM-24W	24	2640	180 × 180



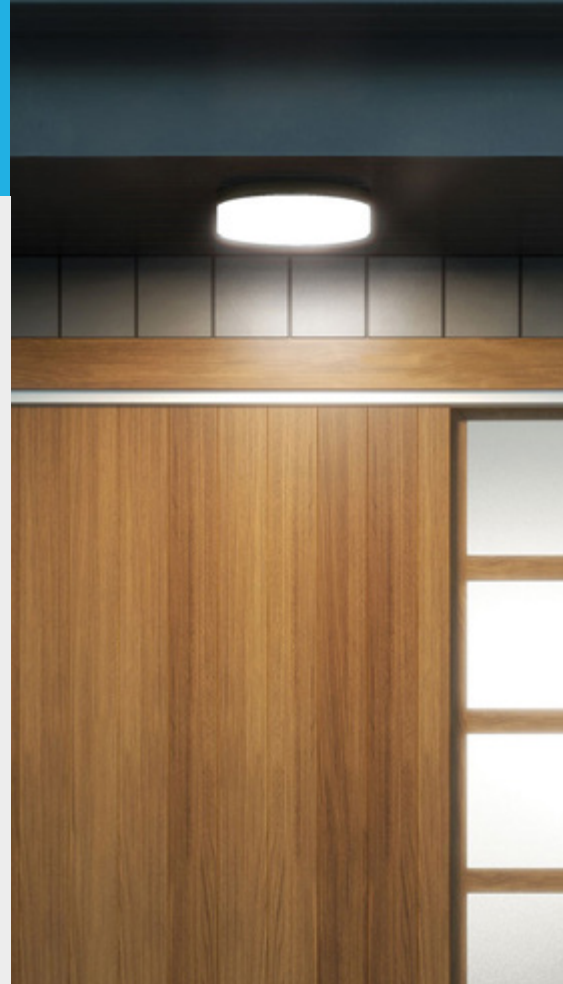

6500K
Lighting Colour

110lm/W
Lumens per Watt

1Kv
Surge Protection

230v 50Hz
Input Voltage

80
CRI

40000Hrs
Lifespan



2D LED Retrofit Modules with Variable CCT

Replacement for conventional 2D fluorescent tubes.

Designed to replace traditional 2D fluorescent lamps with energy-efficient, long-lasting LED technology. These retrofit modules offer instant start-up, improved brightness, and significantly reduced power consumption, making them an ideal choice for bulkheads, ceiling fittings, and other 2D fixtures.

- ➔ Selectable CCT with 3 colour temperatre settings; 3000K/4000K/6500K.
- ➔ Longer lifespan that uses up to 90% less energy than traditional bulbs.
- ➔ 1mm aluminium housing with heat resistant PC lens.
- ➔ CE/EMC certified driver.
- ➔ Quick and easy installation with magnetic attachment.
- ➔ Built-in surge protection up to 1Kv.
- ➔ High quality Sanan 2835 SMD LED chips

Barcode	Model Number	Power Output (W)	Lumen Output	Dimensions (mm)
6009803785774	RM2D-VARI-12W	12	1320	135 × 135
6009803785781	RM2D-VARI-18W	18	1980	151 × 151
6009803785798	RM2D-VARI-24W	24	2640	180 × 180





	200-250v AC Input Voltage		4.5 kV Surge Protection		1W Power Consumption
	60 LUX Switch On Sensitivity		90 LUX Switch Off Sensitivity		IP54 Outdoor Use



20 A Photocell

Premium quality Day/Night Sensor with surge protection.

The Lumina Pro Series Photocell Day/Night Sensor is engineered to provide reliable and efficient dusk-to-dawn automation for your lighting systems. Designed for compatibility with all types of lighting, this advanced photocell is designed for residential, commercial and industrial applications, ensuring your lights operate only when needed, conserving energy and extending the lifespan of your fixtures.

- ➡ Surge resistance for 8/20 μ s wave shape 4.5 kV.
- ➡ Durable IP54 plastic construction.

Barcode	Model Number	Rated Current	LUX Sensitivity	IP Rating	Dimensions (mm)
6009804146932	LPPC-020A	20 A	60 - 90	54	70 x 70 x 80



220-240v AC
Input Voltage



5 - 50 LUX
Sensitivity



IP44
Outdoor Use



16 A Photocell


Day/Night Sensor with adjustable sensitivity.

The Essentia Series Photocell Day/Night Sensor provides seamless lighting automation by turning lights on and off based on ambient light levels. Designed for compatibility with all types of lighting, this sensor ensures energy efficiency and convenience, making it an ideal solution for both residential and commercial applications.

- Adjustable sensitivity level between 5-50 LUX.
- Durable IP44 plastic construction.

Barcode	Model Number	Rated Current	LUX Sensitivity	IP Rating	Dimensions (mm)
6009804146970	PLCS-550A	16 A	5 - 50	44	80 x 80 x 80



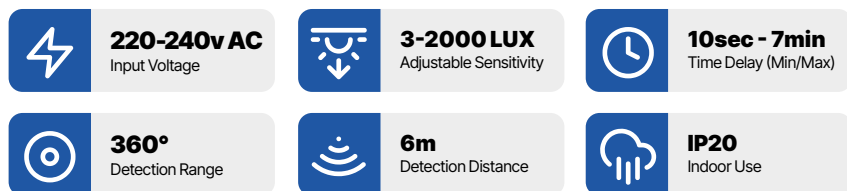

PIR Occupancy Motion Sensors

High-sensitivity PIR motion detection and automatic lighting control.

This sensor uses a high-sensitivity PIR detector and integrated circuitry to provide automatic, convenient and energy-efficient control. It detects infrared radiation from people and activates the connected load when motion is detected. The sensor automatically distinguishes between day and night.

➔ Smart PIR motion detection for energy-efficient control.

Barcode	Model Number	Mounting Type	LUX Sensitivity	IP Rating	Dimensions (mm)
6009804578924	MPIR-S001	Surface	3-2000	20	Ø115 × 65
6009804578931	MPIR-R001	Recessed	3-2000	20	Ø76 × 73


6500K
Lighting Colour

105lm/W
Lumens per Watt

80
CRI

-10-45°C
Operating Temp

220°
Lighting Angle

30000Hrs
Lifespan

A60/A65 LED Bulbs

Traditional bulbs for general lighting applications.

Combines classic design with modern energy-saving technology, delivering bright, reliable light for everyday use. Ideal for homes, offices, and commercial spaces, these bulbs offer excellent efficiency, long lifespan, and instant full brightness with no warm-up time.

- ➔ Frosted lens for greater light radiance.
- ➔ Made from high quality polycarbonate and aluminium.

Barcode	Model Number	Power Output (W)	Lumen Output	Lighting Colour	Cap Type
6001651178784	A60-B22-6500-05	5	525	6500K	B22
6001651486490	A60-B22-6500-09	9	945	6500K	B22
6001651097351	A60-B22-6500-12	12	1260	6500K	B22
6001651542530	A65-B22-6500-15	15	1575	6500K	B22
6001651207026	A60-E27-6500-05	5	525	6500K	E27
6001651178791	A60-E27-6500-09	9	945	6500K	E27
6001651342581	A60-E27-6500-12	12	1260	6500K	E27
6001651122695	A65-E27-6500-15	15	1575	6500K	E27



	Various Lighting Colour		105lm/W Lumens per Watt		80 CRI
	-10-45°C Operating Temp		220° Lighting Angle		30000Hrs Lifespan




G45 LED Bulbs

Traditional bulbs for general lighting applications.

The perfect blend of classic shape and modern efficiency, offering bright, energy-saving light in a compact form. Ideal for decorative fixtures, bedside lamps, and small fittings, these bulbs provide instant full brightness with a warm, welcoming glow. With low power consumption and a long lifespan, they're a cost-effective, eco-friendly alternative to traditional incandescent bulbs.

- ➔ Frosted lens for greater light radiance.
- ➔ Made from high quality polycarbonate and aluminium.

Barcode	Model Number	Power Output (W)	Lumen Output	Lighting Colour	Cap Type
6009804146253	G45-E14-3000-05	5	525	3000K	E14
6009804146246	G45-E14-6500-05	5	525	6500K	E14
6009804146277	G45-E27-3000-05	5	525	3000K	E27
6009804146260	G45-E27-6500-05	5	525	6500K	E27
6009804146291	G45-B22-3000-05	5	525	3000K	B22
6009804146284	G45-B22-6500-05	5	525	6500K	B22

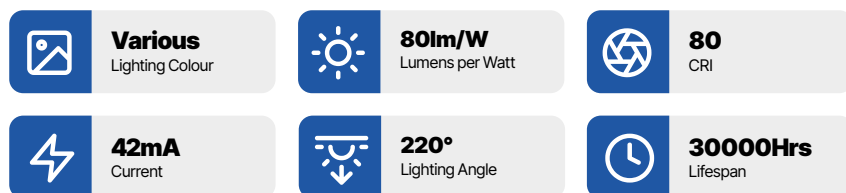


A60 LED Colour Bulbs

Colour bulbs for various lighting applications.

Perfect for parties, décor accents, or mood lighting. These energy-efficient bulbs provide bright, consistent colour while using a fraction of the power of traditional lighting, making them a fun and versatile lighting solution for both indoor and outdoor use.

- ➔ Frosted lens for greater light radiance.
- ➔ Made from high quality polycarbonate and aluminium.

Barcode	Model Number	Power Output (W)	Lumen Output	Lighting Colour	Cap Type
6009803785170	A60-B22-RED-06	6	480	Red	B22
6009803785187	A60-B22-GRN-06	6	480	Green	B22
6009803785194	A60-B22-BLU-06	6	480	Blue	B22
6009803785200	A60-B22-YEL-06	6	480	Yellow	B22
6009803785217	A60-E27-RED-06	6	480	Red	E27
6009803785224	A60-E27-GRN-06	6	480	Green	E27
6009803785231	A60-E27-BLU-06	6	480	Blue	E27
6009803785248	A60-E27-YEL-06	6	480	Yellow	E27

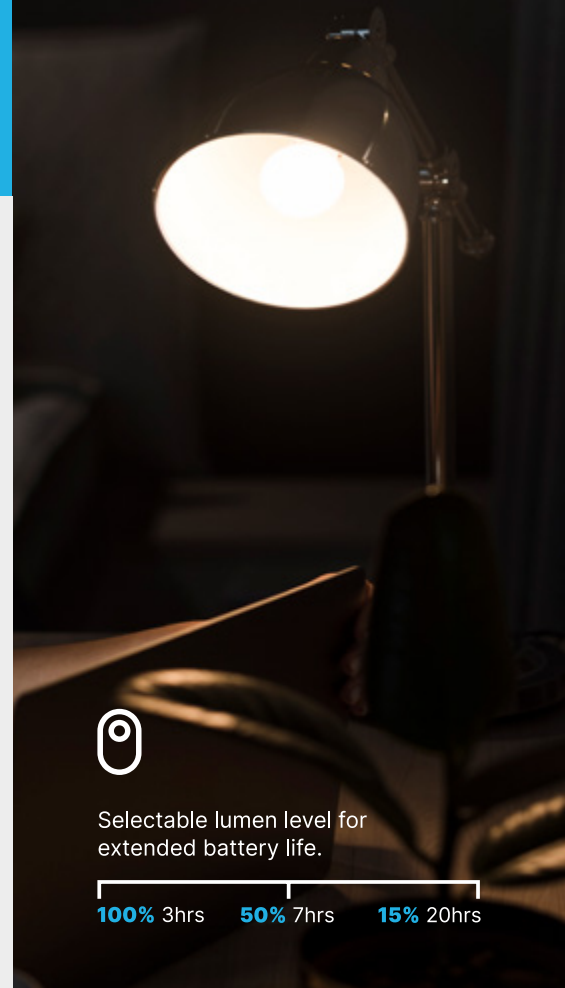

6500K
Lighting Colour

105lm/W
Lumens per Watt

80
CRI

2-4Hrs
Charging Time

220°
Lighting Angle

30000Hrs
Lifespan



A60/A65 LED Emergency Bulbs

Rechargeable Emergency Lamp with Lithium-Ion Battery.

combine everyday lighting with built-in backup power, ensuring you're never left in the dark. Featuring a rechargeable lithium-ion battery, these bulbs automatically switch to emergency mode during power outages, providing up to 20 hours of continuous light.

- ➔ Built-in Lithium-Ion battery for high energy density and a long lifespan. Recharges via AC mains power.
- ➔ Selectable lumen level allows for extended battery life.
- ➔ Includes lamp holder hanging hook for use anywhere around the house when charged.

Barcode	Model Number	Power Output (W)	Lumen Output	Cap Type
6009803785095	A60-B22-6500-12E	12	1260	B22
6009803785101	A60-E27-6500-12E	12	1260	E27



6500K
Lighting Colour

105lm/W
Lumens per Watt

80
CRI

90mA
Current

220°
Lighting Angle

30000Hrs
Lifespan

2yrs
Warranty

A60 LED Sensor Bulbs

Includes built-in day/night sensor.

This smart lamp works by simply plugging it into your existing light fittings. Just plug the light in, turn it on at the switch, and you are done. Automatically switches on at night using the built-in day/night sensor.

- ➔ Frosted lens for greater light radiance
- ➔ Made from high quality polycarbonate and aluminium
- ➔ Built-in day/night sensor

Barcode	Model Number	Power Output (W)	Lumen Output	Cap Type
6009804578009	A60-B22-6500-12S	12	1260	B22
6009803785088	A60-E27-6500-12S	12	1260	E27





6500K
Lighting Colour

105lm/W
Lumens per Watt

80
CRI

78mA
Current

160°
Lighting Angle

30000Hrs
Lifespan



T37 LED Stick Bulbs

Slim form factor bulbs for general lighting applications.

Offers a sleek, energy-efficient lighting solution with a compact design that fits perfectly into narrow or enclosed fixtures. Providing bright, even illumination with minimal power consumption, these bulbs are ideal for both residential and commercial use. With instant start-up, long lifespan, and excellent colour rendering, they're a smart upgrade from traditional incandescent or CFL bulbs.

- ➔ Frosted lens for greater light radiance.
- ➔ Made from high quality polycarbonate and aluminium.
- ➔ CE, RoHS and TUV certifications.

Barcode	Model Number	Power Output (W)	Lumen Output	Cap Type
6001651150940	T37-B22-6500-07	7	735	B22
6001651178807	T37-E27-6500-07	7	735	E27





Various
Lighting Colour

105lm/W
Lumens per Watt

80
CRI

-10-45°C
Operating Temp

160°
Lighting Angle

30000Hrs
Lifespan

2yrs
Warranty

C37 LED Candle Bulbs

Slim form factor bulbs for general lighting applications.

Designed with elegance in mind, these bulbs seamlessly blend aesthetic appeal with practical illumination. Perfect for chandeliers and decorative fixtures, candle bulbs create a warm ambiance, adding a touch of sophistication to any setting. These bulbs can perfectly replace conventional incandescent bulbs of up to 54W. Made from high quality PC and aluminium. The light emitted is scattered over a 160° angle.

- ➡ Frosted lens for greater light radiance.
- ➡ Made from high quality polycarbonate and aluminium.
- ➡ CE, RoHS and TUV certifications.


Barcode	Model Number	Power Output (W)	Lumen Output	Lighting Colour	Cap Type
6009803785682	C37-B22-3000-05	5	525	3000K	B22
6009803785705	C37-B22-4000-05	5	525	4000K	B22
6009803785729	C37-B22-6500-05	5	525	6500K	B22
6009803785699	C37-B22-3000-07	7	735	3000K	B22
6009803785712	C37-B22-4000-07	7	735	4000K	B22





C37 LED Candle Bulbs

Barcode	Model Number	Power Output (W)	Lumen Output	Lighting Colour	Cap Type
6009803785736	C37-B22-6500-07	7	735	6500K	B22
6009803785620	C37-E27-3000-05	5	525	3000K	E27
6009803785644	C37-E27-4000-05	5	525	4000K	E27
6009803785668	C37-E27-6500-05	5	525	6500K	E27
6009803785637	C37-E27-3000-07	7	735	3000K	E27
6009803785651	C37-E27-4000-07	7	735	4000K	E27
6009803785675	C37-E27-6500-07	7	735	6500K	E27
6009803785569	C37-E14-3000-05	5	525	3000K	E14
6009803785583	C37-E14-4000-05	5	525	4000K	E14
6009803785606	C37-E14-6500-05	5	525	6500K	E14
6009803785576	C37-E14-3000-07	7	735	3000K	E14
6009803785590	C37-E14-4000-07	7	735	4000K	E14
6009803785613	C37-E14-6500-07	7	735	6500K	E14

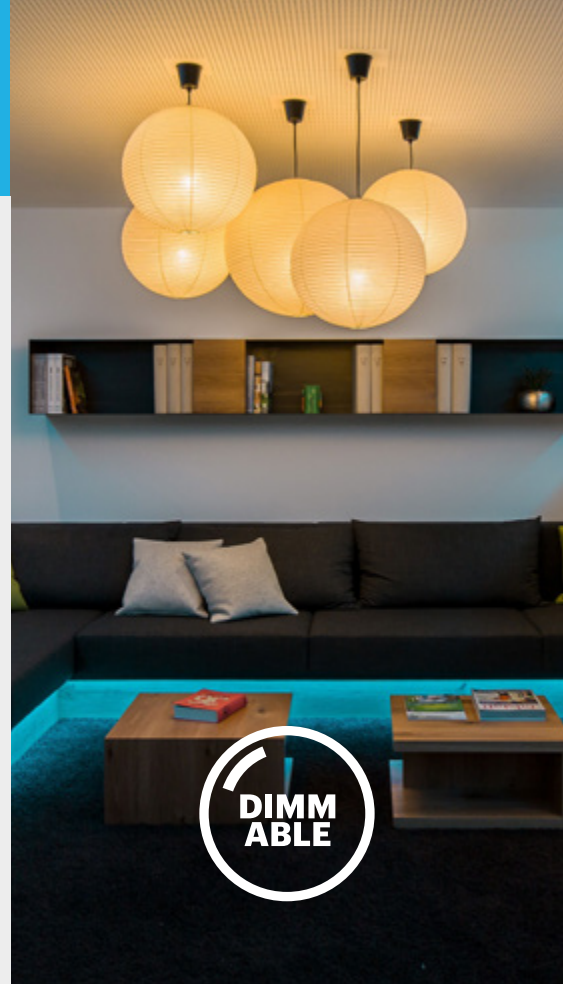

6500K Lighting Colour	105lm/W Lumens per Watt	80 CRI
-10-45° C Operating Temp	160° Lighting Angle	30000Hrs Lifespan



C37 LED Dimmable Candle Bulbs


Slim form factor bulbs for general lighting applications.

Designed with elegance in mind, these bulbs seamlessly blend aesthetic appeal with practical illumination. Perfect for chandeliers and decorative fixtures, candle bulbs create a warm ambiance, adding a touch of sophistication to any setting. These bulbs can perfectly replace conventional incandescent bulbs of up to 54W. Made from high quality PC and aluminium. The light emitted is scattered over a 160° angle.

- ➡ Frosted lens for greater light radiance.
- ➡ Made from high quality polycarbonate and aluminium.
- ➡ CE, RoHS and TUV certifications.

Barcode	Model Number	Power Output (W)	Lumen Output	Cap Type
6009804146222	C37-E14-6500-07D	7	735	E14



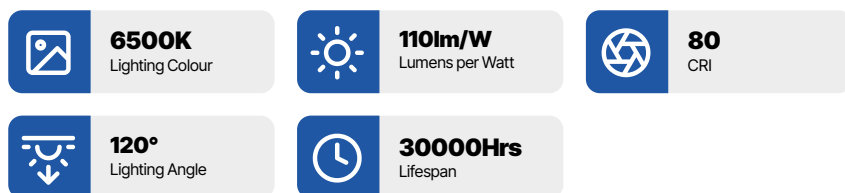


T80/120 LED Bulbs

High-output bulbs for industrial and commercial lighting applications.

Designed for large, high-ceiling spaces, the T80 and T120 LED bulbs provide powerful, wide-area illumination while offering a practical replacement for traditional high-wattage lamps. Their high-output design makes them ideal for demanding environments where bright, reliable lighting is essential.

- ➔ High-output LED illumination.
- ➔ Available in T80 and T120 sizes.
- ➔ Designed for large commercial and industrial spaces.
- ➔ Suitable for high ceilings.
- ➔ Wide-area light distribution.

Barcode	Model Number	Power Output (W)	Lumen Output	Cap Type
6009804578108	T80-E27-6500-20	20	2200	E27
6009804578115	T120-E27-6500-40	40	4400	E27

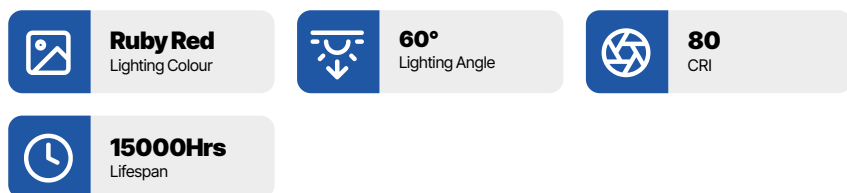

R125 Infrared Reflector Lamps

Infrared reflector lamps for targeted heating and warming applications.

R125 infrared reflector lamps provide focused, radiant heat for targeted warming applications. Designed with a reflector to direct infrared energy where it is needed, they are commonly used for livestock and animal heating, food warming, bathrooms, workshops and other heat-focused applications.

- ➔ Focused infrared heat for targeted warming.
- ➔ Reflector design directs heat where it is needed.
- ➔ Ideal for animal, food and general heating applications.

Barcode	Model Number	Power Output (W)	Lumen Output	Lighting Colour	Cap Type
6009804578085	R125-E27175	175	3500	Ruby Red	E27
6009803785705	R125-E27250	250	5000	Ruby Red	E27





	Various Lighting Colour		105lm/W Lumens per Watt		80 CRI
	180-265v AC Input Voltage		38° Lighting Angle		30000Hrs Lifespan



GU10 LED Bulbs 38°


Bright, directional light for general lighting applications.

The 38-degree downlight bulbs offer focused and precise lighting, ideal for accentuating specific areas or objects. With a narrow beam angle, they provide a concentrated illumination that adds sophistication to any space. These bulbs are perfect for highlighting artwork, architectural features, or creating a spotlight effect for a stylish ambiance.

- ➔ High efficiency, energy saving LED bulb technology.
- ➔ CE, RoHS and TUV certifications.

Barcode	Model Number	Power Output (W)	Lumen Output	Lighting Colour	Dimensions
6009803785033	GU10-3000-03805	5	525	3000K	50 x 53mm
6009803785040	GU10-4000-03805	5	525	4000K	50 x 53mm
6001651514582	GU10-6500-03805	5	525	6500K	50 x 53mm
6009803785057	GU10-3000-03807	7	735	3000K	50 x 53mm
6009803785064	GU10-4000-03807	7	735	4000K	50 x 53mm
6001651180299	GU10-6500-03807	7	735	6500K	50 x 53mm



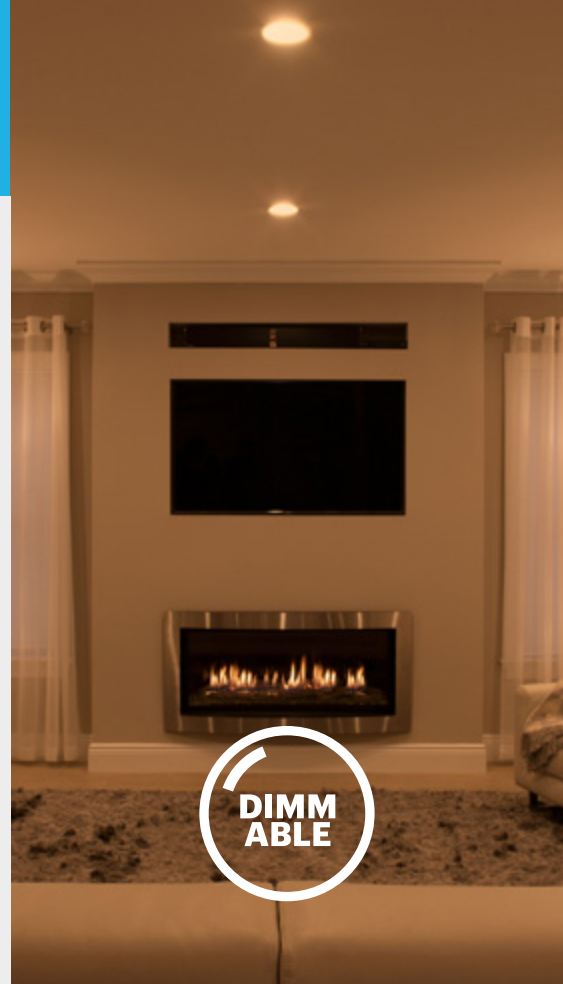

	6500K Lighting Colour		105lm/W Lumens per Watt		80 CRI
	180-265v AC Input Voltage		38° Lighting Angle		30000Hrs Lifespan



GU10 LED Dimmable Bulbs 38°


Dimmable, directional light for general lighting applications.

The 38-degree downlight bulbs offer focused and precise lighting, ideal for accentuating specific areas or objects. With a narrow beam angle, they provide a concentrated illumination that adds sophistication to any space. These bulbs are perfect for highlighting artwork, architectural features, or creating a spotlight effect for a stylish ambiance.

- ➔ High efficiency, energy saving LED bulb technology.
- ➔ CE, RoHS and TUV certifications.

Barcode	Model Number	Power Output (W)	Lumen Output	Lighting Colour	Dimensions
6009804146208	GU10-6500-03807D	7	735	6500K	50 x 53mm



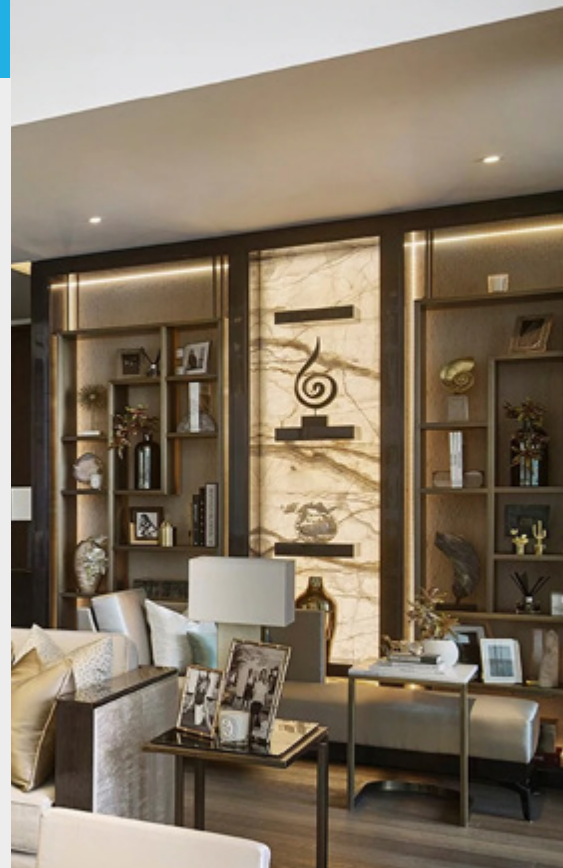

	6500K Lighting Colour		105lm/W Lumens per Watt		80 CRI
	180-265v AC Input Voltage		120° Lighting Angle		30000Hrs Lifespan



GU10 LED Bulbs 120°

Bright, directional light for general lighting applications.

Designed for optimal dispersion, these bulbs cast a wide and even glow, eliminating shadows and creating a welcoming ambiance. Perfect for spaces where comprehensive, well-distributed illumination is key, our bulbs redefine lighting comfort and efficiency.

- ➔ High efficiency, energy saving LED bulb technology.
- ➔ CE, RoHS and TUV certifications.

Barcode	Model Number	Power Output (W)	Lumen Output	Lighting Colour	Dimensions
6009803785804	GU10-6500-12005	5	525	6500K	50 x 53mm
6009803785743	GU10-6500-12007	7	735	6500K	50 x 53mm





	Various Lighting Colour		4.7lm/W Lumens per Watt		80 CRI
	180-265v AC Input Voltage		38° Lighting Angle		30000Hrs Lifespan



GU10 LED Colour Bulbs 38°


Bright, coloured light for various lighting applications.

Designed for optimal dispersion, these bulbs cast a wide and even glow, eliminating shadows and creating a welcoming ambiance. Perfect for spaces where comprehensive, well-distributed illumination is key, our bulbs redefine lighting comfort and efficiency.

- ➔ High efficiency, energy saving LED bulb technology.
- ➔ CE, RoHS and TUV certifications.

Barcode	Model Number	Power Output (W)	Lumen Output	Lighting Colour	Dimensions
6009803785156	GU10-BLU-03806	6	28	Blue	50 x 53mm
6009803785149	GU10-GRN-03806	6	28	Green	50 x 53mm
6009803785132	GU10-RED-03806	6	28	Red	50 x 53mm
6009803785163	GU10-YEL-03806	6	28	Yellow	50 x 53mm





95mm
Diameter



80mm
Cutout Diameter



Aluminium
Material




Round 95mm Tiltable GU10 Downlight Fittings

High quality tiltable GU10 downlight fitting. Excludes lamp holder and bulb.

Our elegant downlight fittings offer the perfect blend of functionality and style, seamlessly integrating into any space while illuminating it with grace and sophistication. Crafted with meticulous attention to detail, these fittings boast sleek designs and high-quality materials that elevate the ambiance of any room.

- ➔ Available in Satin Chrome, Gun Metal, Antique Brass, White.
- ➔ High quality aluminium construction.

Barcode	Model Number	Colour	Overall Diameter	Cut-Out Diameter
6009803785415	DSC-9580RT	Satin Chrome	95mm	80mm
6009803785408	DGM-9580RT	Gun Metal	95mm	80mm
6009803785392	DAB-9580RT	Antique Brass	95mm	80mm
6009803785422	DWT-9580RT	White	95mm	80mm



95 x 95mm
Dimensions



80mm
Cutout Diameter



Aluminium
Material



1yr
Warranty

Square 95mm Tiltable GU10 Downlight Fittings

High quality tiltable GU10 downlight fitting. Excludes lamp holder and bulb.



Our elegant downlight fittings offer the perfect blend of functionality and style, seamlessly integrating into any space while illuminating it with grace and sophistication. Crafted with meticulous attention to detail, these fittings boast sleek designs and high-quality materials that elevate the ambiance of any room.

- Available in Satin Chrome, Gun Metal, Antique Brass, White.
- High quality aluminium construction.

Barcode	Model Number	Colour	Dimensions	Cut-Out Diameter
6009803785453	DSC-9580ST	Satin Chrome	95mm x 95mm	80mm
6009803785446	DGM-9580ST	Gun Metal	95mm x 95mm	80mm
6009803785460	DWT-9580ST	White	95mm x 95mm	80mm



illuminate your world.

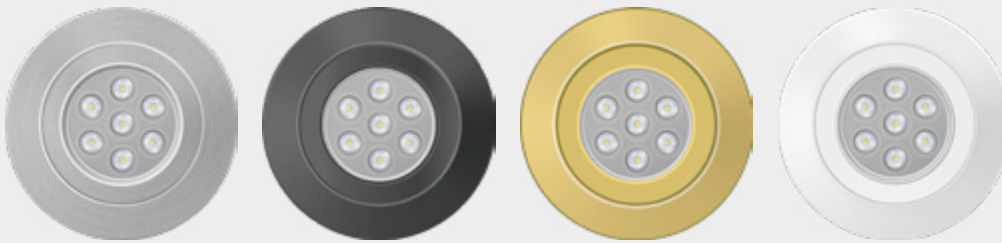

95mm
Diameter



75mm
Cutout Diameter



Aluminium
Material




Round 82mm Twist-Lock Design GU10 Downlight Fittings

High quality twist-lock design GU10 downlight fitting. Excludes lamp holder and bulb.

Our elegant downlight fittings offer the perfect blend of functionality and style, seamlessly integrating into any space while illuminating it with grace and sophistication. Crafted with meticulous attention to detail, these fittings boast sleek designs and high-quality materials that elevate the ambiance of any room.

- ➔ Available in Satin Chrome, Gun Metal, Antique Brass, White.
- ➔ High quality aluminium construction.
- ➔ Twist-Lock design for easy and convenient bulb fitment and replacement.

Barcode	Model Number	Colour	Overall Diameter	Cut-Out Diameter
6009804146109	DSC-8275TL	Satin Chrome	82mm	75mm
6009804146093	DGM-8275TL	Gun Metal	82mm	75mm
6009804146086	DAB-8275TL	Antique Brass	82mm	75mm
6009804146116	DWT-8275TL	White	82mm	75mm



85mm
Diameter



75mm
Cutout Diameter



Polycarb
Material



Round 85mm Anti-Glare GU10 Downlight Fittings

Recessed anti-glare bulb fitment.

Crafted with precision engineering, these fixtures are designed to minimize glare, ensuring a soft, diffused light that enhances visibility without causing discomfort or eye strain. Whether used in residential or commercial settings, our downlight fittings create inviting atmospheres with balanced lighting distribution, allowing for optimal task performance and relaxation.

- ➔ Available in White or Black.
- ➔ High quality polycarbonate construction.

Barcode	Model Number	Colour	Dimensions	Cut-Out Diameter
6009804146123	DWT-8575RAG	White	85mm	75mm
6009804146130	DBK-8575RAG	Black	85mm	75mm



illuminate your world.



GU10
Fitting Type



80mm
Cutout Diameter



Aluminium
Material



GU10 Lamp Holders

Suitable for general commercial and residential lighting applications.

Crafted with precision and attention to detail, these lamp holders are designed to withstand the rigors of everyday use while providing a reliable base for your lighting fixtures. The ceramic material ensures optimal heat dissipation, prolonging the lifespan of your bulbs and enhancing safety.

- ➔ High quality ceramic and steel construction.
- ➔ CE, RoHS and TUV certifications.

Barcode	Model Number	Bracket Included	Material	Fitting Type
6009803785811	ILH-GU10EB	No	Ceramic	GU10
6009803785828	ILH-GU10IB	Yes	Ceramic	GU10



220-240v AC
Input Voltage



2A
Rated Current



IP20
Indoor Use



B22 Lamp Holders


Suitable for general commercial and residential lighting applications.

Designed for reliability and ease of use, our B22 holders are compatible with a wide range of light bulbs, making them perfect for homes, offices, and commercial spaces. With a focus on safety and quality, these holders ensure a secure fit and long-lasting performance.

- ➔ High quality construction.
- ➔ CE, RoHS and TUV certifications.

Barcode	Model Number	Units Per Box	Material	Fitting Type
6009804146963	CLH-B2212	12	Plastic	B22 Cord Grip
6009804146956	BLH-B2212	12	Plastic	B22 Batten
6009804146949	PLH-B2206	6	Porcelain	B22 Porcelain



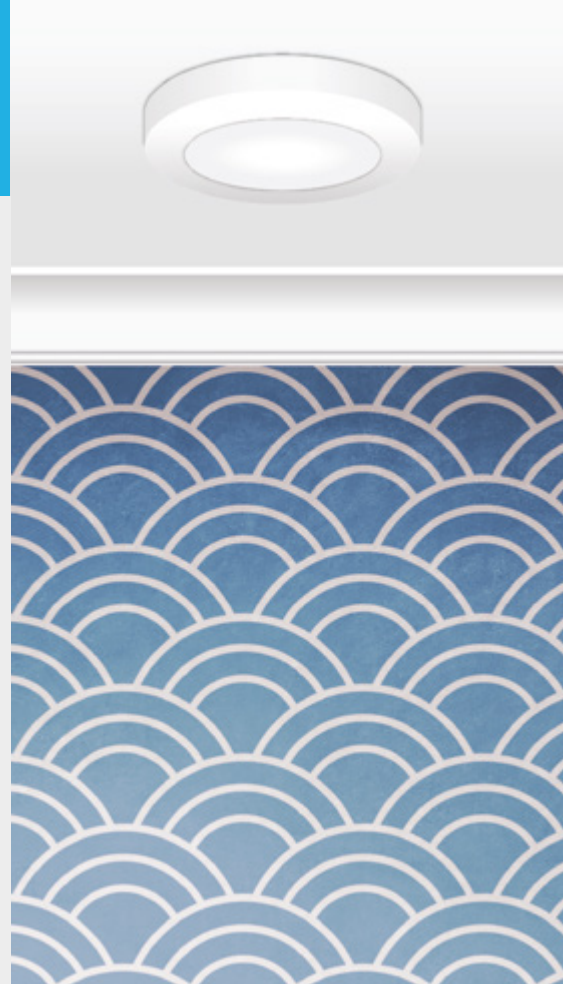

Various
Lighting Colour

170-260v AC
Input Voltage

120°
Lighting Angle

>80
CRI

50000Hrs
Lifespan

3yrs
Warranty


Surface Mount Round LED Panel Lights

A sleek and modern lighting solution for any residential or commercial space.

Designed to blend aesthetically with your ceiling, these energy-efficient lights provide uniform, bright illumination while consuming minimal power. Ideal for both residential and commercial settings, our LED panel lights are easy to install, have a long lifespan. The built-in 3CCT control allows selection between 3 colour temperatures to suit your ideal lighting environment.

- ➔ Selectable colour temperature between 3000/4000/6500K.
- ➔ Built-in surge protection up to 1kV.
- ➔ Durable plastic construction.

Barcode	Model Number	Power Output (W)	Lumen Output	Lighting Colour	Dimensions (mm)
6009804146420	PSR-3CCT-12006	6	390	3CCT	ø120
6009804146437	PSR-3CCT-17012	12	900	3CCT	ø170
6009804146444	PSR-3CCT-22518	18	1440	3CCT	ø225
6009804146451	PSR-3CCT-30024	24	1920	3CCT	ø300

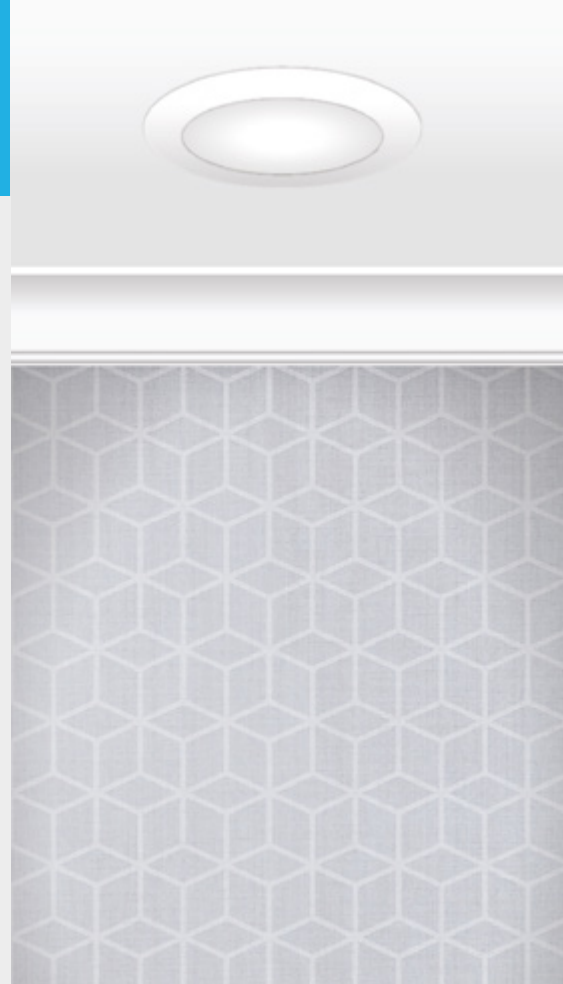

Various
Lighting Colour

170-260v AC
Input Voltage

120°
Lighting Angle

>80
CRI

50000Hrs
Lifespan

3yrs
Warranty

Recessed Mount Round LED Panel Lights


A sleek and modern lighting solution for any residential or commercial space.

Designed to blend seamlessly into your ceiling, these energy-efficient lights provide uniform, bright illumination while consuming minimal power. Ideal for both residential and commercial settings, our LED panel lights are easy to install, have a long lifespan. The built-in 3CCT control allows selection between 3 colour temperatures to suit your ideal lighting environment.

- Selectable colour temperature between 3000/4000/6500K.
- Built-in surge protection up to 1kV.
- Durable plastic construction.

Barcode	Model Number	Power Output (W)	Lumen Output	Lighting Colour	Dimensions (mm)
6009804146345	PRR-3CCT-12006	6	390	3CCT	ø120
6009804146352	PRR-3CCT-17012	12	900	3CCT	ø170
6009804146369	PRR-3CCT-22518	18	1440	3CCT	ø225
6009804146376	PRR-3CCT-30024	24	1920	3CCT	ø300



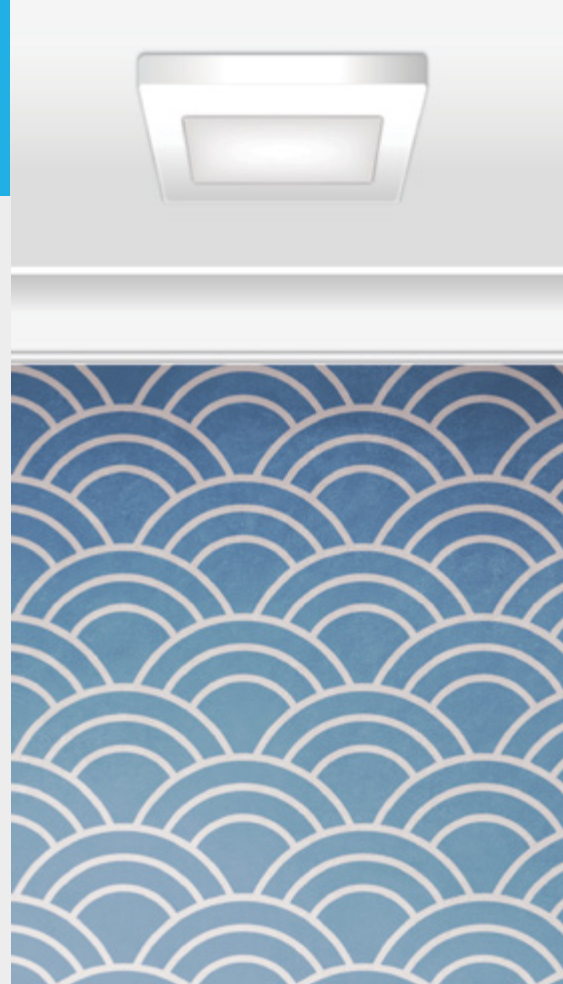

Various
Lighting Colour

170-260v AC
Input Voltage

120°
Lighting Angle

>80
CRI

50000Hrs
Lifespan



Surface Mount Square LED Panel Lights


A sleek and modern lighting solution for any residential or commercial space.

Designed to blend aesthetically with your ceiling, these energy-efficient lights provide uniform, bright illumination while consuming minimal power. Ideal for both residential and commercial settings, our LED panel lights are easy to install, have a long lifespan. The built-in 3CCT control allows selection between 3 colour temperatures to suit your ideal lighting environment.

- ➔ Selectable colour temperature between 3000/4000/6500K.
- ➔ Built-in surge protection up to 1kV.
- ➔ Durable plastic construction.

Barcode	Model Number	Power Output (W)	Lumen Output	Lighting Colour	Dimensions (mm)
6009804146475	PSS-3CCT-17012	12	900	3CCT	170 × 170
6009804146482	PSS-3CCT-22518	18	1440	3CCT	225 × 225
6009804146499	PSS-3CCT-30024	24	1920	3CCT	280 × 280



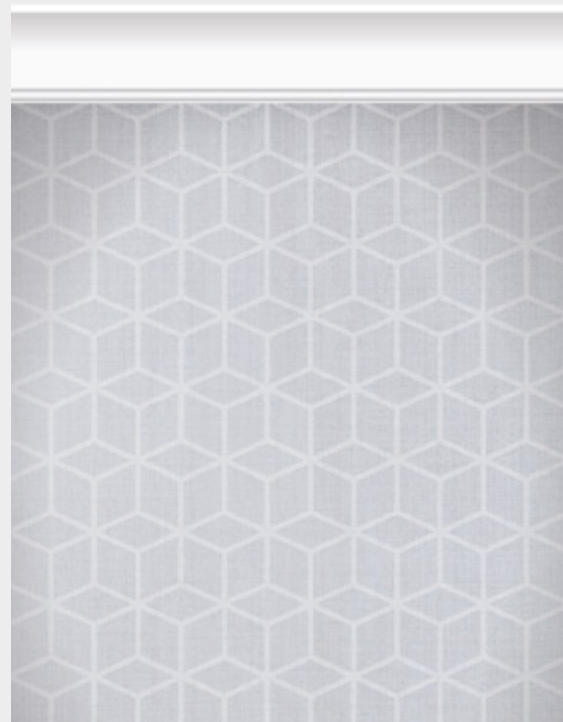

Various
Lighting Colour

170-260v AC
Input Voltage

120°
Lighting Angle

>80
CRI

50000Hrs
Lifespan



Recessed Mount Square LED Panel Lights



A sleek and modern lighting solution for any residential or commercial space.

Designed to blend seamlessly into your ceiling, these energy-efficient lights provide uniform, bright illumination while consuming minimal power. Ideal for both residential and commercial settings, our LED panel lights are easy to install, have a long lifespan. The built-in 3CCT control allows selection between 3 colour temperatures to suit your ideal lighting environment.

- Selectable colour temperature between 3000/4000/6500K.
- Built-in surge protection up to 1kV.
- Durable plastic construction.

Barcode	Model Number	Power Output (W)	Lumen Output	Lighting Colour	Dimensions (mm)
6009804146390	PRS-3CCT-17012	12	900	3CCT	170 × 170
6009804146406	PRS-3CCT-22518	18	1440	3CCT	225 × 225
6009804146413	PRS-3CCT-30024	24	1920	3CCT	280 × 280



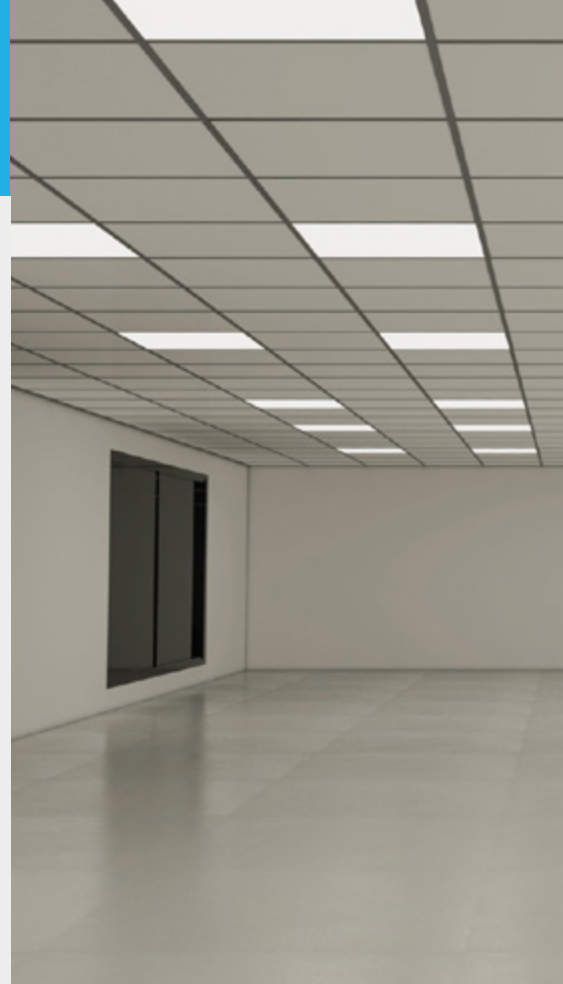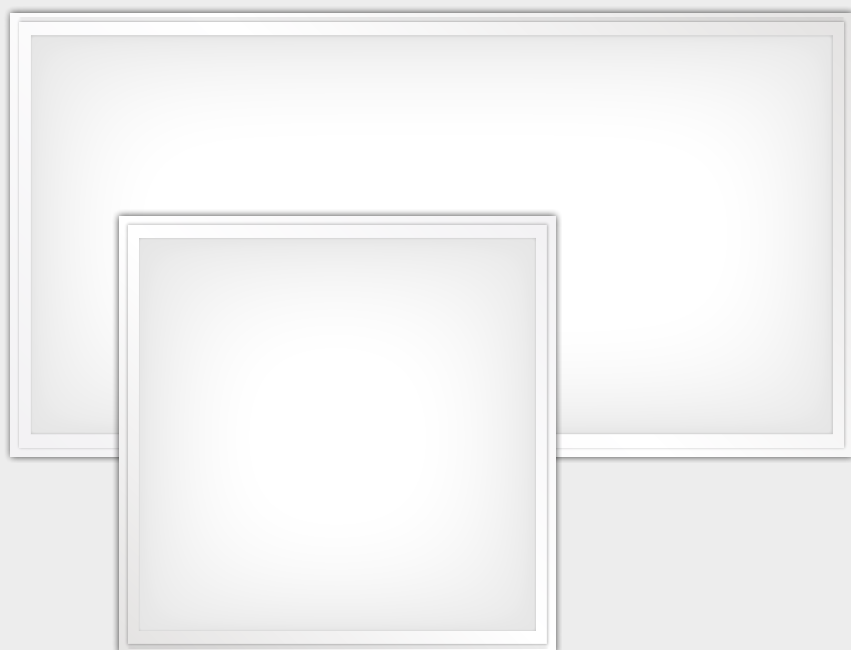

Various
Lighting Colour

170-260v AC
Input Voltage

120°
Lighting Angle

>80
CRI

50000Hrs
Lifespan



Recessed Mount Backlit LED Panel Lights

A sleek and modern lighting solution for any commercial space.

Designed to blend seamlessly into your ceiling, these energy-efficient lights provide uniform, bright illumination while consuming minimal power. Ideal for both residential and commercial settings, our LED panel lights are easy to install, have a long lifespan. The built-in 3CCT control allows selection between 3 colour temperatures to suit your ideal lighting environment.

- ➔ Selectable colour temperature between 3000/4000/6500K.
- ➔ Built-in surge protection up to 1kV.
- ➔ Durable plastic construction.
- ➔ Available in 3 or 5 year warranty models.

Barcode	Model Number	Wattage (W)	Lumen Output	Lighting Colour	Warranty (Yrs)	Dimensions (mm)
6009804146505	PSC-3CCT-06040	40	4000	3CCT	5	600 × 600
6009804146512	PSC-3CCT-12060	60	6000	3CCT	5	1200 × 600
6009804578986	PRS-3CCT-06340	40	4000	3CCT	3	600 × 600
6009804578993	PRS-3CCT-12360	60	6000	3CCT	3	1200 × 600







6500K
Lighting Colour

170-260v AC
Input Voltage

120°
Lighting Angle

>80
CRI

50000Hrs
Lifespan

3yrs
Warranty

LED Ceiling Lights

Stylish, practical illumination for any indoor space.

Our range of LED round ceiling fittings is designed to bring stylish, energy-efficient lighting to indoor living spaces. Available in sleek plain designs or elegant patterned finishes, these fittings provide comfortable illumination while adding a refined decorative touch to bedrooms, lounges, kitchens, hallways, and more.

- ➔ High quality integrated LED chipset.
- ➔ Durable plastic construction.

Barcode	Model Number	Power Output (W)	Lumen Output	Lighting Colour	Dimensions (mm)
6009804578207	ICL-6500-018A	18	1440	6500K	ø230×55
6009804578214	ICL-6500-018B	18	1440	6500K	ø230×55
6009804578221	ICL-6500-018C	18	1440	6500K	ø230×55
6009804578238	ICL-6500-018D	18	1440	6500K	ø230×55
6009804578245	ICL-6500-018E	18	1440	6500K	ø230×55
6009804578252	ICL-6500-024A	24	1920	6500K	ø300×55
6009804578269	ICL-6500-024B	24	1920	6500K	ø300×55
6009804578276	ICL-6500-024C	24	1920	6500K	ø300×55
6009804578283	ICL-6500-036A	36	2880	6500K	ø350×55



Available Models

Model Number	Wattage
ICL-6500-018A	18W
ICL-6500-024A	24W



Available Models

Model Number	Wattage
ICL-6500-018A	18W
ICL-6500-024A	24W



Available Models

Model Number	Wattage
ICL-6500-018C	18W
ICL-6500-036A	36W



Available Models

Model Number	Wattage
ICL-6500-018B	18W
ICL-6500-024B	24W



Available Models

Model Number	Wattage
ICL-6500-018E	18W
ICL-6500-024C	24W







3 Speed
Wall Control



65W
Fan Motor



300RPM
Fan Speed



220V AC
Input Power

3 Blade 3 Speed Ceiling Fan

Ideal for warehouses, workshops, factories, retail spaces and other large areas.

Designed for efficient air circulation in large commercial and industrial spaces, this robust ceiling fan features a 3 speed wall control for convenient adjustment of airflow. Its clean white finish and light-free design make it ideal for functional ventilation in areas where reliable air movement is essential.

- ➔ Durable steel construction.
- ➔ High efficiency fan motor with 3 speed wall control.
- ➔ Ideal for industrial and commercial applications.

Barcode	Model Number	Fan Motor (W)	Fan Speed (RPM)	Lighting Colour	Dimensions (mm)
6009804578078	CFSS-5601-WHT	65	300	N/A	ø1422 x 400



Various Lighting Colour	3 Speed Summer/Winter	15W Bulb
12W Fan Motor	230V AC Input Power	1500lm Lumens



6 Blade 3 Speed Compact B22 Ceiling Fan

Combines sleek design with efficient performance.

Designed to fit a standard B22 socket, it offers easy installation without the need for complex wiring. With three adjustable speed settings, you can choose the airflow level that best suits your comfort, whether you need a gentle breeze or more powerful cooling. Compact yet effective, this ceiling fan is ideal for both small and medium-sized spaces, providing a reliable and energy-efficient cooling solution.

- ➔ Selectable 3000/4000/6500K lighting colours.
- ➔ Efficient DC motor with 3 speed settings.
- ➔ Includes full function remote control.

Barcode	Model Number	Fan Motor (W)	Lumen Output	Lighting Colour	Dimensions (mm)
6009804146703	CFML-1801-6WT	12	1500	3CCT	ø520 × 184



CFSR-JB01-5SC



CFSR-JB01-5SC

Various
Lighting Colour

6 Speed
Summer/Winter

20W
Bulb

40W
Fan Motor

230V AC
Input Power

2200lm
Lumens



5 Blade 6 Speed Ceiling Fan

Elegant design with advanced functionality and efficient high performance.

Sleek 5-blade design complemented by an integrated energy-efficient LED light, offering selectable colour temperatures of 3000K, 4000K, and 6500K to create the perfect ambience for any setting. Powered by a high-efficiency DC motor, the fan delivers powerful airflow with six adjustable speed settings and the flexibility of summer and winter modes for year-round comfort. Includes a full-function remote control, allowing effortless adjustment of both lighting and fan settings from anywhere in the room.

- ➔ Integrated energy efficient LED light with selectable 3000/4000/6500K lighting colours.
- ➔ High efficiency DC fan motor with 6 speed settings for summer and winter modes.
- ➔ Includes full function remote control.

Barcode	Model Number	Fan Motor (W)	Lumen Output	Lighting Colour	Dimensions (mm)
6009804146659	CFSR-JB01-5SC	40	2200	3CCT	ø1300 x 415
6009804146666	CFSR-JB01-5SW	40	2200	3CCT	ø1300 x 415



Various
Lighting Colour



6 Speed
Summer/Winter



15W
Bulb



35W
Fan Motor



230V AC
Input Power



1500lm
Lumens

3 Blade 6 Speed Ceiling Fan

Combines contemporary design with efficient performance.

Featuring a sleek 3-blade design that offers a modern aesthetic while ensuring optimal airflow and quiet operation. An integrated energy-efficient LED light provides versatile illumination with selectable colour temperatures of 3000K, 4000K, and 6500K, making it easy to set the right mood for any space. Powered by a high-efficiency DC motor, the fan offers six speed settings along with dedicated summer and winter modes for year-round comfort and energy savings. Complete with a full-function remote control, the Sirocco Series delivers effortless convenience, blending elegance, functionality, and efficiency in one refined ceiling fan.

- ➔ Integrated energy efficient LED light with selectable 3000/4000/6500K lighting colours.
- ➔ High efficiency DC fan motor with 6 speed settings for summer and winter modes.
- ➔ Includes full function remote control.

Barcode	Model Number	Fan Motor (W)	Lumen Output	Lighting Colour	Dimensions (mm)
6009804146604	CFSR-3801-3WT	35	1500	3CCT	ø970 × 323



Various
Lighting Colour

6 Speed
Summer/Winter

18W
Bulb

35W
Fan Motor

230V AC
Input Power

2200lm
Lumens



3 Blade 6 Speed Ceiling Fan

Combines contemporary design with efficient performance.

Featuring a sleek 3-blade design that offers a modern aesthetic while ensuring optimal airflow and quiet operation. An integrated energy-efficient LED light provides versatile illumination with selectable colour temperatures of 3000K, 4000K, and 6500K, making it easy to set the right mood for any space. Powered by a high-efficiency DC motor, the fan offers six speed settings along with dedicated summer and winter modes for year-round comfort and energy savings. Complete with a full-function remote control, the Sirocco Series delivers effortless convenience, blending elegance, functionality, and efficiency in one refined ceiling fan.

- ➔ Integrated energy efficient LED light with selectable 3000/4000/6500K lighting colours.
- ➔ High efficiency DC fan motor with 6 speed settings for summer and winter modes.
- ➔ Includes full function remote control.

Barcode	Model Number	Fan Motor (W)	Lumen Output	Lighting Colour	Dimensions (mm)
6009804146611	CFSR-4209-3BK	35	2200	3CCT	ø1063 x 400





Various
Lighting Colour

6 Speed
Summer/Winter

18W
Bulb

40W
Fan Motor

230V AC
Input Power

2200lm
Lumens



3 Blade 6 Speed Ceiling Fan

Combines contemporary design with efficient performance.

Featuring a sleek 3-blade design that offers a modern aesthetic while ensuring optimal airflow and quiet operation. An integrated energy-efficient LED light provides versatile illumination with selectable colour temperatures of 3000K, 4000K, and 6500K, making it easy to set the right mood for any space. Powered by a high-efficiency DC motor, the fan offers six speed settings along with dedicated summer and winter modes for year-round comfort and energy savings. Complete with a full-function remote control, the Sirocco Series delivers effortless convenience, blending elegance, functionality, and efficiency in one refined ceiling fan.

- ➔ Integrated energy efficient LED light with selectable 3000/4000/6500K lighting colours.
- ➔ High efficiency DC fan motor with 6 speed settings for summer and winter modes.
- ➔ Includes full function remote control.

Barcode	Model Number	Fan Motor (W)	Lumen Output	Lighting Colour	Dimensions (mm)
6009804146628	CFSR-4210-3WT	40	2200	3CCT	ø1064 × 411



Various
Lighting Colour



6 Speed
Summer/Winter



24W
Bulb



45W
Fan Motor



230V AC
Input Power



2400lm
Lumens

5 Blade 6 Speed Ceiling Fan

Combines contemporary design with efficient performance.

Featuring a sleek 5-blade design that offers a modern aesthetic while ensuring optimal airflow and quiet operation. An integrated energy-efficient LED light provides versatile illumination with selectable colour temperatures of 3000K, 4000K, and 6500K, making it easy to set the right mood for any space. Powered by a high-efficiency DC motor, the fan offers six speed settings along with dedicated summer and winter modes for year-round comfort and energy savings. Complete with a full-function remote control, the Sirocco Series delivers effortless convenience, blending elegance, functionality, and efficiency in one refined ceiling fan.

- ➔ Integrated energy efficient LED light with selectable 3000/4000/6500K lighting colours.
- ➔ High efficiency DC fan motor with 6 speed settings for summer and winter modes.
- ➔ Includes full function remote control.

Barcode	Model Number	Fan Motor (W)	Lumen Output	Lighting Colour	Dimensions (mm)
6009804146642	CFSR-5602-5BK	45	2400	3CCT	ø1424 × 340



Various
Lighting Colour



6 Speed
Summer/Winter



24W
Bulb



40W
Fan Motor



230V AC
Input Power



2400lm
Lumens

5 Blade 6 Speed Ceiling Fan

Combines contemporary design with efficient performance.

Featuring a sleek 5-blade design that offers a modern aesthetic while ensuring optimal airflow and quiet operation. An integrated energy-efficient LED light provides versatile illumination with selectable colour temperatures of 3000K, 4000K, and 6500K, making it easy to set the right mood for any space. Powered by a high-efficiency DC motor, the fan offers six speed settings along with dedicated summer and winter modes for year-round comfort and energy savings. Complete with a full-function remote control, the Sirocco Series delivers effortless convenience, blending elegance, functionality, and efficiency in one refined ceiling fan.

- ➔ Integrated energy efficient LED light with selectable 3000/4000/6500K lighting colours.
- ➔ High efficiency DC fan motor with 6 speed settings for summer and winter modes.
- ➔ Includes full function remote control.

Barcode	Model Number	Fan Motor (W)	Lumen Output	Lighting Colour	Dimensions (mm)
6009804146635	CFSR-4202-5BK	40	2400	3CCT	ø1076 × 389



Various
Lighting Colour



6 Speed
Summer/Winter



30W
Bulb



30W
Fan Motor



230V AC
Input Power



1850lm
Lumens

3 Blade 6 Speed Compact Ceiling Fan

Contemporary design and advanced functionality in a space-saving form.

Elegant design featuring innovative retractable auto-folding blades that neatly conceal when not in use, creating a sleek and modern ceiling light aesthetic. The integrated energy-efficient LED light provides versatile illumination with selectable colour temperatures of 3000K, 4000K, and 6500K, allowing you to tailor the ambience to your preference. Driven by a high-efficiency DC motor, the fan delivers smooth, powerful airflow with six speed options and dedicated summer and winter modes for year-round comfort.

- ➔ Integrated energy efficient LED light with selectable 3000/4000/6500K lighting colours.
- ➔ High efficiency DC fan motor with 6 speed settings for summer and winter modes.
- ➔ Elegant design with retractable auto-folding fan blades.
- ➔ Includes full function remote control.

Barcode	Model Number	Fan Motor (W)	Lumen Output	Lighting Colour	Dimensions (mm)
6009804146703	CFZR-4206-3BK	30	1850	3CCT	ø1050 × 330



 Various Lighting Colour	 6 Speed Summer/Winter	 30W Bulb
 30W Fan Motor	 230V AC Input Power	 1850lm Lumens



3 Blade 6 Speed Compact Ceiling Fan

Contemporary design and advanced functionality in a space-saving form.

Elegant design featuring innovative retractable auto-folding blades that neatly conceal when not in use, creating a sleek and modern ceiling light aesthetic. The integrated energy-efficient LED light provides versatile illumination with selectable colour temperatures of 3000K, 4000K, and 6500K, allowing you to tailor the ambience to your preference. Driven by a high-efficiency DC motor, the fan delivers smooth, powerful airflow with six speed options and dedicated summer and winter modes for year-round comfort.

- ➔ Integrated energy efficient LED light with selectable 3000/4000/6500K lighting colours.
- ➔ High efficiency DC fan motor with 6 speed settings for summer and winter modes.
- ➔ Elegant design with retractable auto-folding fan blades.
- ➔ Includes full function remote control.

Barcode	Model Number	Fan Motor (W)	Lumen Output	Lighting Colour	Dimensions (mm)
6009804146680	CFZR-4206-3WT	30	1850	3CCT	ø1050 × 330



Various
Lighting Colour

6 Speed
Summer/Winter

35W
Bulb

30W
Fan Motor

230V AC
Input Power

2500lm
Lumens



3 Blade 6 Speed Compact Ceiling Fan

Contemporary design and advanced functionality in a space-saving form.

Elegant design featuring innovative retractable auto-folding blades that neatly conceal when not in use, creating a sleek and modern ceiling light aesthetic. The integrated energy-efficient LED light provides versatile illumination with selectable colour temperatures of 3000K, 4000K, and 6500K, allowing you to tailor the ambience to your preference. Driven by a high-efficiency DC motor, the fan delivers smooth, powerful airflow with six speed options and dedicated summer and winter modes for year-round comfort.

- ➔ Integrated energy efficient LED light with selectable 3000/4000/6500K lighting colours.
- ➔ High efficiency DC fan motor with 6 speed settings for summer and winter modes.
- ➔ Elegant design with retractable auto-folding fan blades.
- ➔ Includes full function remote control.

Barcode	Model Number	Fan Motor (W)	Lumen Output	Lighting Colour	Dimensions (mm)
6009804146697	CFZR-4206-3GD	30	2500	3CCT	ø11060 × 365





IPX4
Splash Proof



2000 r/pm
Fan Speed



230V AC
Input Power



Ceiling/Wall Mount Extractor Fans

Powerful performance with a sleek, practical design.

Suitable for any bathroom or utility space. Engineered with a high extraction rate, they effectively remove excess moisture and unwanted odours, helping to maintain a fresh and healthy environment. With an IPX4 splashproof rating and low maintenance design, these units are perfectly suited for bathroom installations, combining durability, efficiency, and ease of use.

- ➔ High extraction rate to remove moisture and odours.
- ➔ Energy efficient with low power consumption.
- ➔ Durable motor for long-life, maintenance-free use.
- ➔ IPX4 rated for splashproof bathroom installation.
- ➔ Class II double insulated, no earth connection required.

Barcode	Model Number	Fan Motor (W)	Speed (RPM)	Airflow (m3/min)	Dimensions (mm)
6009804146079	EFE-0100WT	15	2000	1.7	158 × 158 × 80
6009804146147	EFE-0120WT	25	2000	2.75	172 × 172 × 85
6009804146154	EFE-0150WT	25	2000	3.6	208 × 208 × 87





IP20
Splash Proof



1200 r/pm
Fan Speed



230V AC
Input Power



Ceiling Mount Extractor Fans

Efficient and reliable ventilation for a healthier indoor environment.

Featuring a high extraction rate, these fans are designed to effectively eliminate moisture and odours, making them ideal for bathrooms, kitchens, and utility areas. Built with energy efficiency in mind, these fans deliver powerful performance while keeping power consumption low. The durable motor ensures long-lasting operation giving you peace of mind and dependable use over time.

- ➔ Energy efficient with low power consumption.
- ➔ Durable motor for long-life, maintenance-free use.
- ➔ Class II double insulated, no earth connection required.

250mm available in white or black.

Barcode	Model Number	Fan Motor (W)	Speed (RPM)	Airflow (m3/min)	Dimensions (mm)
6009804146192	CFE-0200WT	30	1200	4	ø300×120
6009804146215	CFE-0250WT	40	1200	6.4	ø350×130
6009804578177	CFE-0250BK	40	1200	6.4	ø350×130



illuminate your world.



	6500K Lighting Colour		80-90lm/W Lumens per Watt		90° Lighting Angle
	6kVA Surge Protection		IP 65 Indoor/Outdoor Use		30000Hrs Lifespan



Ecolite Series LED UFO High Bay Lights

Perfect for warehouses, workshops, factories, gymnasiums, and other large indoor spaces.

Designed to illuminate large, high-ceiling spaces with precision and clarity, these fixtures deliver powerful illumination while minimising energy consumption. Their sleek and compact UFO design maximises light distribution, ensuring uniform brightness across the area below. Perfect for warehouses, factories, gymnasiums, and other large indoor spaces, our LED Ecolite Series UFO high bay lights offer affordability, reliability and durability.

- ➔ Built-in surge protection up to 6 kva.
- ➔ Die cast Aluminum heatsink and frame.
- ➔ High quality SM2835 LED chips.
- ➔ Weatherproof IP65 rating.

Barcode	Model Number	Power Output (W)	Lumen Output	Lighting Colour	Dimensions (mm)
6009804146604	EHBL-6500-100B	100	8000	6500K	ø236 x 29
6009804146628	EHBL-6500-150B	150	13500	6500K	ø269 x 29
6009804146611	EHBL-6500-200B	200	18000	6500K	ø330 x 31





6500K
Lighting Colour

140lm/W
Lumens per Watt

90°
Lighting Angle

6kVA
Surge Protection

IP65
Indoor/Outdoor Use

80000Hrs
Lifespan



Lumina Pro Series LED UFO High Bay Lights

Perfect for warehouses, workshops, factories, gymnasiums, and other large indoor spaces.

Designed to illuminate large, high-ceiling spaces with precision and clarity, these fixtures deliver powerful illumination while minimising energy consumption. Their sleek and compact UFO design maximises light distribution, ensuring uniform brightness across the area below. Perfect for warehouses, factories, gymnasiums, and other large indoor spaces, our Lumina Pro Series LED UFO high bay lights offer long-lasting reliability and durability, thanks to their solid construction and advanced LED technology.

- ➔ Frosted lens for greater light radiance.
- ➔ Die cast Aluminum heatsink and frame.
- ➔ High quality SM2835 LED chips.
- ➔ Built-in surge protection up to 6kVA.
- ➔ Weatherproof IP65 construction.

Barcode	Model Number	Power Output (W)	Lumen Output	Lighting Colour	Dimensions (mm)
6009804146161	UHBL-6500-100B	100	14000	6500K	ø270 × 91
6009804146178	UHBL-6500-150B	150	21000	6500K	ø300 × 96
6009804146185	UHBL-6500-200B	200	28000	6500K	ø330 × 103





6500K Lighting Colour	90° Lighting Angle	12Hrs Runtime
5-8Hrs Charging Time	IP 65 Indoor/Outdoor Use	30000Hrs Lifespan

Solar LED Streetlights

Perfect for streets, driveways, parking areas, pathways, and outdoor security lighting.

LED solar streetlights with a built-in PIR motion sensor provide reliable, energy-efficient illumination without mains power. The integrated solar panel charges the battery during the day, while the motion sensor automatically increases illumination when movement is detected, making them ideal for streets, driveways, parking areas, pathways and security lighting.

- ➔ High efficiency, energy saving LED bulb technology.
- ➔ Compact ABS plastic lamp body design.
- ➔ Durable IP65 rated weatherproof housing and components.
- ➔ Built-in PIR motion sensor with 120° detection angle.

Barcode	Model Number	Power Output (W)	Lumen Output	Lighting Colour	Dimensions (mm)
6009804146239	SSL-6500-030	30	250	6500K	395 × 133 × 40



6500K
Lighting Colour

140lm/W
Lumens per Watt

120°
Lighting Angle

6kVA
Surge Protection

IP 65
Indoor/Outdoor Use

35000Hrs
Lifespan



LED Bulkhead Fittings

Perfect for residential, commercial, industrial, indoor and outdoor areas.

Ellipse and oval LED bulkhead fittings designed to provide efficient, reliable illumination in indoor and outdoor environments. Featuring integrated LED technology, durable plastic construction and IP54 protection, they are ideal for corridors, entrances, walkways, garages, commercial buildings and general-purpose lighting applications.

- ➔ Energy saving LED technology.
- ➔ High quality integrated LED chipset.
- ➔ Durable plastic construction with IP54 rating.
- ➔ Built-in surge protection up to 1.5 kv.

Barcode	Model Number	Power Output (W)	Lumen Output	Lighting Colour	Dimensions (mm)
6009804578122	BKH-6500-012R	12	1080	6500K	ø135 × 38
6009804578153	BKH-6500-012E	12	1080	6500K	160 × 85 × 38
6009804578139	BKH-6500-018R	18	1620	6500K	ø175 × 38
6009804578160	BKH-6500-018E	18	1620	6500K	195×94×38
6009804578146	BKH-6500-024R	24	2160	6500K	ø195 × 38





Built-in surge protection up to 2.5KV

40W 1200mm Slim LED Linear Fitting
Integrated LED, No additional lamp required.

LED

illuminate your world.

40W Power	3600 lm Lumens	6500K Lighting Colour
80 CRI	185-265V AC Voltage	IP20 Indoor Use
1200x75x23 Dimensions	35000 hrs Lifespan	3 Yrs Warranty

6500K Lighting Colour	75lm/W Lumens per Watt	IP20 Indoor Use
180-265v AC Input Voltage	180° Lighting Angle	40000Hrs Lifespan

Slim LED Linear Fittings


Integrated LED, No additional lamp required.

Offers a sleek and modern lighting solution, ideal for both commercial and residential spaces. Designed with a low-profile housing and high-efficiency LED technology, these fittings provide bright, even illumination while maintaining a clean, minimal aesthetic. Perfect for offices, retail environments, kitchens, or under-shelf lighting.

- ➔ Durable polycarbonate construction.
- ➔ High efficiency, energy saving LED bulb technology.
- ➔ Contains no environmentally harmful chemicals or gases.
- ➔ Long lifespan that uses up to 90% less energy than traditional bulbs, reduces replacement and environmental waste.
- ➔ Enjoy perfect light quality, instant on with no warm up time.

Barcode	Model Number	Power Output (W)	Lumen Output	Lighting Colour	Dimensions (mm)
6009908836784	ILF-6500-060020	20	1800	6500K	600 x 75 x 23
6009908836791	ILF-6500-060040	40	3600	6500K	1200 x 75 x 23
6001651122688	ILF-6500-060055	55	4950	6500K	1500 x 75 x 23



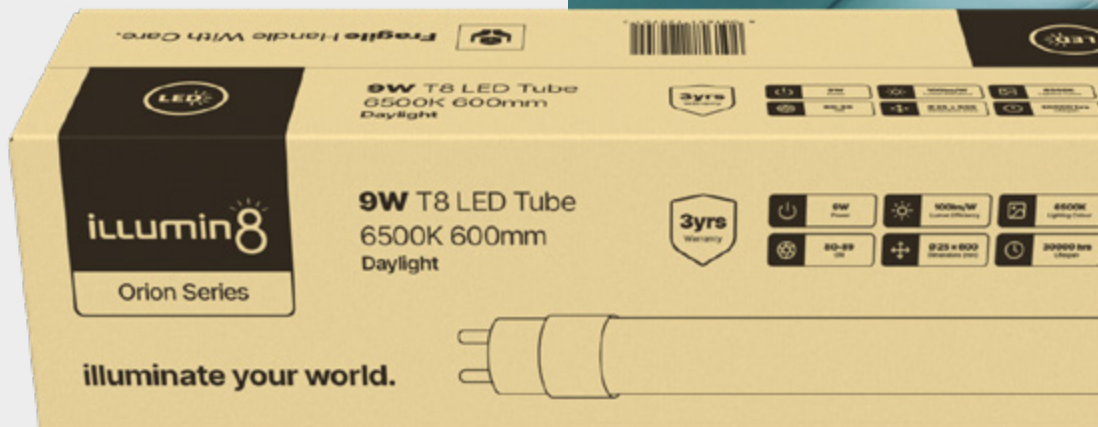

6500K
Lighting Colour


100lm/W
Lumens per Watt

80 - 89
CRI

180-265v AC
Input Voltage

360°
Lighting Angle

30000Hrs
Lifespan

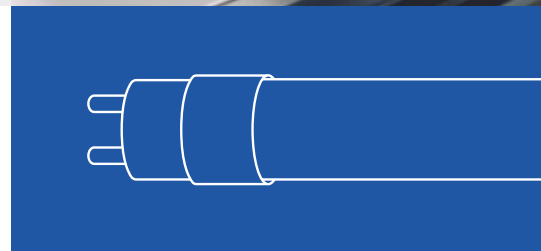

T8 LED Tubes

Ideal solution for replacing traditional fluorescent lamps. Provides more illumination with less energy consumption.


Crafted from premium materials and advanced LED technology, they ensure longevity and durability, offering a long-lasting lighting solution for both commercial and residential settings. Our T8 LED tubes seamlessly upgrade any existing fluorescent lighting system, providing a more sustainable and environmentally friendly alternative.



Barcode	Model Number	Power Output (W)	Lumen Output	Lighting Colour	Dimensions
6001651122701	T8-6500-0600-09	9	900	6500K	Ø 25 × 600
6001651095173	T8-6500-1200-18	18	1800	6500K	Ø 25 × 1200
6001651598674	T8-6500-1500-24	24	2400	6500K	Ø 25 × 1500





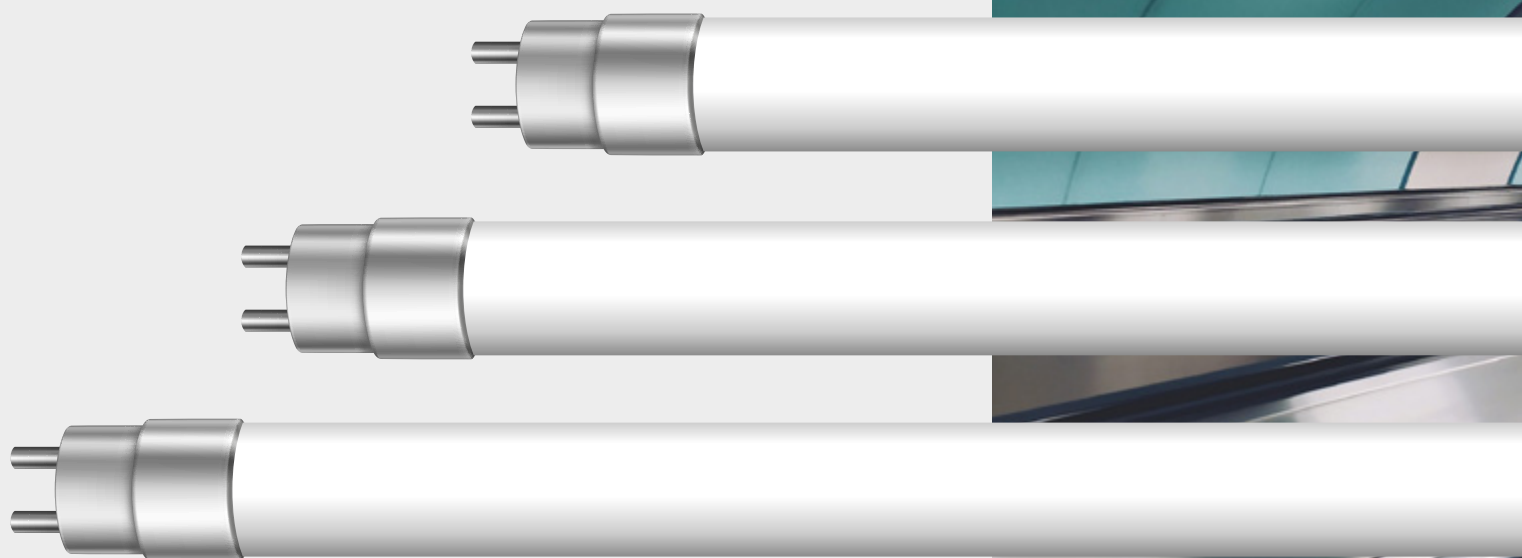

Various
Lighting Colour



100lm/W
Lumens per Watt



80 - 89
CRI



180-265v AC
Input Voltage



360°
Lighting Angle



30000Hrs
Lifespan



T5 LED Tubes

Ideal solution for replacing traditional fluorescent lamps.

Crafted from premium materials and advanced LED technology, they ensure longevity and durability, offering a long-lasting lighting solution for both commercial and residential settings. Our T5 LED tubes seamlessly upgrade any existing fluorescent lighting system, providing a more sustainable and environmentally friendly alternative.



Model Number	Power Output (W)	Lumen Output	Lighting Colour	Dimensions
T5C-4000-055009	9	900	4000K	Ø 16 × 550
T5C-4000-085012	12	1200	4000K	Ø 16 × 850
T5C-4000-115018	18	1800	4000K	Ø 16 × 1150
T5C-4000-145024	24	2400	4000K	Ø 16 × 1450
T5C-6500-055009	9	900	6500K	Ø 16 × 550
T5C-6500-085012	12	1200	6500K	Ø 16 × 850
T5C-6500-115018	18	1800	6500K	Ø 16 × 1150
T5C-6500-145024	24	2400	6500K	Ø 16 × 1450







T8 Open Channel Fixtures

For use with LED tubes.

Cost-effective and practical solution for LED tube lighting in a variety of settings. Designed specifically for use with T8 LED tubes, these open channel fixtures offer easy installation, efficient heat dissipation, and a clean, minimalist appearance. Ideal for workshops, garages, storage areas, and commercial spaces, they provide reliable support and optimal light distribution, making them a smart choice for retrofits or new installations.

➔ High quality aluminium construction.

Barcode	Model Number	Power Output (W)	Tube Capacity	Dimensions (mm)
6009803785910	FT8-500620-109	1 x 9	1	50 x 620
6009803785927	FT8-501220-118	1 x 18	1	50 x 1220
6009803785934	FT8-501520-124	1 x 24	1	50 x 1520
6009803785941	FT8-500620-209	2 x 9	2	50 x 620
6009803785958	FT8-501220-218	2 x 18	2	50 x 220
6009803785965	FT8-501520-224	2 x 24	2	50 x 1520
	FT8-801220-224	2 x 18	2	80 x 1520
	FT8-801520-224	2 x 24	2	80 x 1520

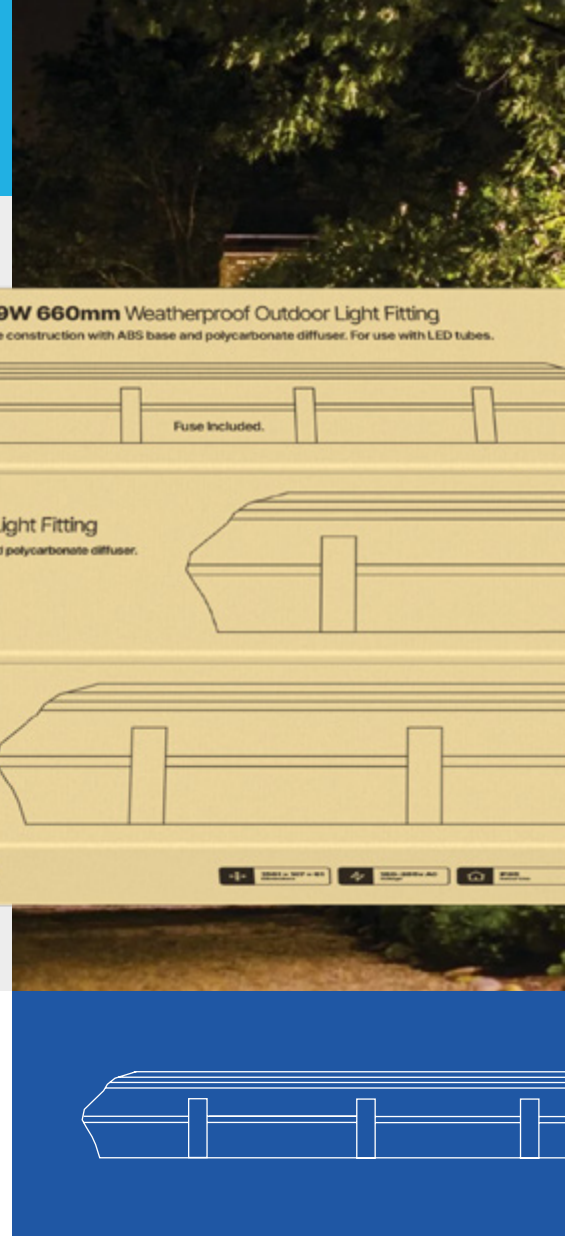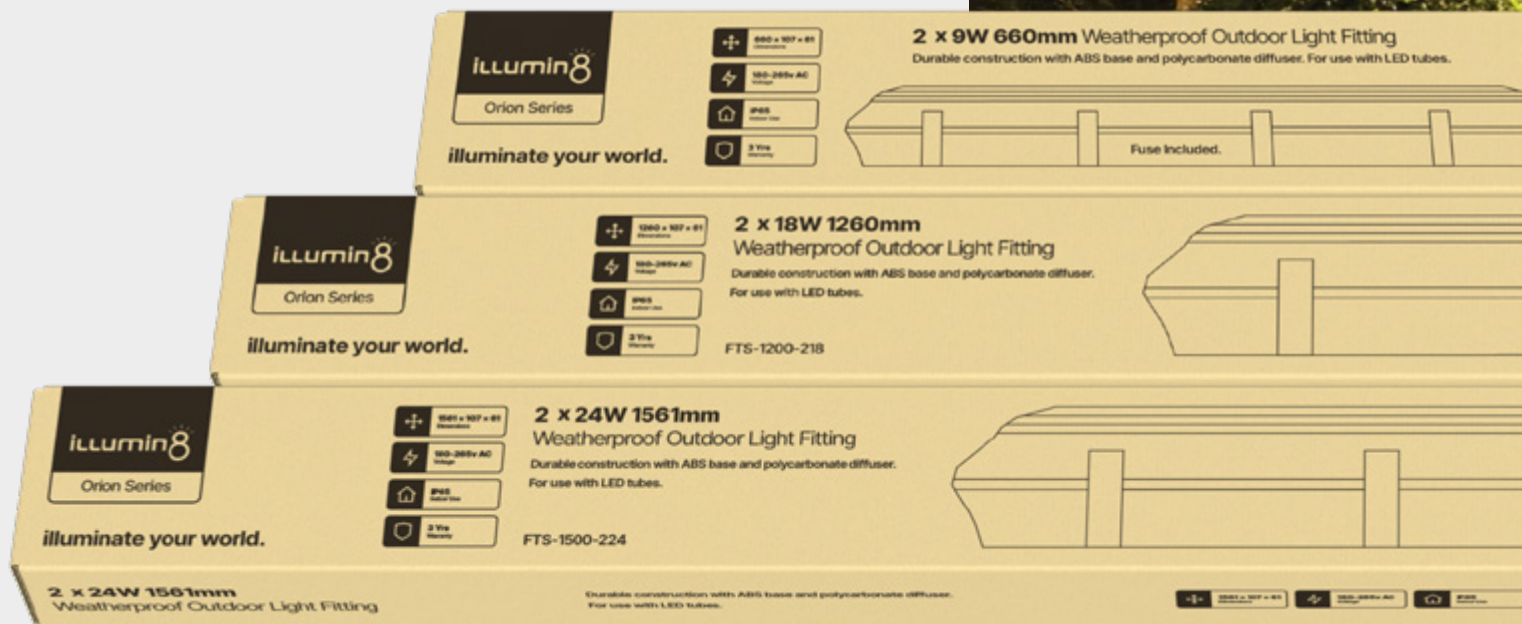

180-265v AC
Input Voltage



180°
Lighting Angle



IP65
Outdoor Use

Weatherproof Outdoor Light Fittings

Durable ABS construction with polycarbonate diffuser, for use with LED tubes.

Built to withstand the elements, featuring a tough ABS base and a high-impact polycarbonate diffuser for long-lasting durability. Designed for use with LED tubes, these fittings provide reliable, energy-efficient lighting in outdoor and industrial environments. Ideal for garages, carports, workshops, and exterior walkways, they offer excellent protection against dust and moisture while delivering bright, even illumination.

➔ High quality ABS construction.



Barcode	Model Number	Power Output (W)	Tube Capacity	Dimensions (mm)
6009803785972	FTS-0600-209	2 x 9	2	660 x 107 x 61
6009803785989	FTS-1200-218	2 x 18	2	1260 x 107 x 61
6009803785996	FTS-1500-224	2 x 24	2	1561 x 107 x 61



LED (Light-Emitting Diode)

A semiconductor device that emits light when an electric current passes through it. LEDs are widely used in lighting applications due to their energy efficiency, longevity, and versatility.

Lumens

A measure of the total quantity of visible light emitted by a source, typically used to describe the brightness of LED bulbs. Lumens indicate the brightness of the light output, rather than the power consumption.

Color Temperature

A characteristic of visible light that describes the warmth or coolness of a light source. It is measured in Kelvin (K). Lower Kelvin temperatures (2000-3000K) produce warm, yellowish light, while higher Kelvin temperatures (5000-6500K) produce cooler, bluish light.

CRI (Color Rendering Index)

A quantitative measure of a light source's ability to reveal the true colours of objects compared to a natural or ideal light source. CRI values range from 0 to 100, with higher values indicating better colour rendering.

Driver

An electronic device that regulates the power supplied to an LED light fixture, ensuring stable and efficient operation. LED drivers convert alternating current (AC) to direct current (DC) and control factors such as voltage, current, and dimming.

Efficiency

The ratio of useful output of light to the energy input. LED lighting is known for its high efficiency compared to traditional lighting sources, such as incandescent or fluorescent bulbs, leading to energy savings and reduced environmental impact.

Heat Sink

A component designed to dissipate heat away from the LED junction, helping to maintain optimal operating temperatures and prolonging the lifespan of the LED.

Dimming

The ability to adjust the brightness level of LED lights. Dimming can be achieved through various methods, including pulse-width modulation (PWM), analog dimming, or digital control systems.

Life Span

The estimated duration of time over which an LED light source is expected to operate before its brightness decreases to a certain percentage of its initial output (typically 70% to 80%). LED lighting fixtures are known for their long lifespan compared to traditional lighting options.

Fixture

The complete lighting assembly, including the LED light source, housing, and any necessary components such as lenses or reflectors. LED fixtures come in various forms, including bulbs, tubes, panels, and downlights, catering to a wide range of applications and environments.

IP Rating (Ingress Protection Rating)

A standardised classification system that rates the degree of protection provided by electrical enclosures against intrusion from foreign objects (such as dust) and moisture. The IP rating is expressed as "IP" followed by two digits, with each digit representing a specific level of protection. The first digit indicates the degree of protection against solids, while the second digit indicates the degree of protection against liquids. For example, an LED fixture with an IP65 rating offers complete protection against dust (6) and protection against low-pressure water jets from any direction (5), making it suitable for outdoor applications where exposure to harsh environmental conditions is expected. IP ratings ensure that LED lighting fixtures are appropriately designed and sealed to withstand specific environmental challenges, ensuring reliable performance and longevity in various indoor and outdoor settings.

Beam Angle

The angular spread of light emitted from an LED fixture, measured in degrees. It determines the coverage area and distribution of light produced by the fixture. A narrow beam angle results in concentrated light output over a smaller area, making it suitable for spot lighting or accent lighting applications. In contrast, a wide beam angle disperses light over a larger area, providing more general illumination and coverage. Beam angles for LED fixtures can vary widely depending on the intended application, with common ranges including narrow spotlights (15-30 degrees), medium floodlights (30-60 degrees), and wide-area floodlights (60+ degrees). Choosing the appropriate beam angle is crucial for achieving the desired lighting effect and ensuring optimal visibility and aesthetics in indoor and outdoor environments.

CCT (Correlated Colour Temperature)

CCT refers to the colour appearance of light emitted by an LED fixture, measured in Kelvin (K). It indicates whether the light appears warm, neutral, or cool. Lower CCT values (2000-3000K) produce warm white light with yellowish hues, resembling the colour of incandescent bulbs and often used for creating a cozy atmosphere in residential and hospitality settings. Higher CCT values (4000-6500K) produce cool white light with bluish tones, resembling daylight and offering enhanced visibility, making it suitable for task lighting in offices, retail spaces, and outdoor areas. CCT allows users to select lighting that complements the ambiance and functionality of different spaces, contributing to comfort, productivity, and visual appeal.





Illumin8 Lighting (Pty) Ltd

54 Siphosethu Road, Trade Park Unit D4
Mount Edgecombe, Durban, 4321
KwaZulu-Natal, South Africa

+27 31 941 5203

sales@illumin8.co.za

WWW.ILLUMIN8.CO.ZA